



HEIDENHAIN



MANUALplus 620

The Contouring Control for CNC and Cycle Lathes

For Gen 3 drives

Information for the
Machine Tool Builder

Contouring control with drive system from HEIDENHAIN

General information

- MANUALplus 620**
- Compact contouring control for **CNC and cycle lathes**
 - Axes: Max. 10 control loops, of which up to 6 are configurable as spindles
 - Suitable for horizontal and vertical lathes as well as vertical boring and turning mills
 - Up to 3 principal axes (X, Z, and Y), B axis, closed-loop spindle and counter spindle, C1/C2 axis, and driven tools
 - Up to 3 programmable auxiliary axes (U, V, W) for control of steady rest, tailstock, and counter spindle
 - The position of a parallel secondary axis can be shown combined with its principal axis
 - Compact design: Screen and main computer in one unit
 - For operation with HEIDENHAIN inverter systems and preferably with HEIDENHAIN motors
 - Uniformly digital with HSCI interface and EnDat interface
 - 15.6-inch multi-touch display with 1366 × 768 pixels
 - Integration of a virtual keypad on the right side of the display
 - Installation dimensions of MC 8420T compatible to MC 7410T
 - CFR CompactFlash memory card (CFast)
 - Programming of turning, drilling, and milling operations with smart.Turn, according to DIN or via cycles
 - TURN PLUS for automated smart.Turn program generation
 - ICP free contour programming for turning and milling contours
 - For simple tool holders (multifix), tool turrets, or tool magazines
- System test** Controls, power modules, motors, and encoders from HEIDENHAIN are usually integrated as components into complete systems. In such cases, comprehensive testing of the complete system is required, irrespective of the specifications of the individual devices.
- Parts subject to wear** Controls from HEIDENHAIN contain parts subject to wear, such as a backup battery and fan.
- Standards** Standards (ISO, EN, etc.) apply only where explicitly stated in the brochure.
- Note** Intel, Intel Xeon, Core, and Celeron are registered trademarks of Intel Corporation.
- Validity** The features and specifications described here apply to the following control and NC software versions:
- MANUALplus 620 with NC software versions**
548431-08 (no export license required)
- This brochure supersedes all previous editions, which thereby become invalid. **Subject to change without notice.**
- Requirements** Some of these specifications require particular machine configurations. Please also note that, for some functions, a special PLC program must be created by the manufacturer.
- Functional safety (FS)** If standard components and FS components (FS = Functional Safety) are not explicitly differentiated, then the information for both versions apply (e.g. MB 720T, MB 720T FS).



Contents

Contouring control with drive system from HEIDENHAIN	2
Overview tables	4
HSCI control components	16
Accessories	24
Cable overview	33
Technical description	39
Data transfer and communication	64
Mounting information	67
Key dimensions	69
General information	80
Subject index	82

Please note the page references in the tables with the specifications.

Using this brochure

This brochure is purely a decision-making aid for selecting HEIDENHAIN components. Additional documentation is required for project development (see "Technical documentation", Page 80).

Overview tables

Components

Control system		MANUALplus 620	Page
Main computer		MC 8420T	16
Storage medium		CFR memory card	18
NC software license		On SIK component	18
Multi-touch display		15.6-inch	
Operating panel		Integrated in the right-hand side of the display	
Machine operating panel		MB 720T, MB 720T FS	21
		PLB 6001, PLB 600x FS (HSCI adapter for OEM machine operating panel)	24
PLC inputs/ outputs¹⁾	With HSCI interface	PL 6000 consisting of PLB 62xx basic module (system PL) or PLB 61xx (expansion PL) and I/O modules	22
		On UEC ²⁾ and UMC ³⁾	
Additional modules¹⁾		CMA-H for analog axes/spindles in the HSCI system	25
		Modules for fieldbus systems	
Inverter systems²⁾		Compact inverters and modular inverters	
Connecting cables		✓	33

¹⁾ May be necessary depending on the configuration

²⁾ For more information, refer to the *Inverter Systems for Gen 3 Drives* brochure

³⁾ For more information, refer to the *Inverter Systems UV 1xx, UVR 1xx, UM 1xx, UEC 1xx, UE 2xx, UR 2xx* brochure

Please note: The MC main computer has no PLC inputs/outputs. Therefore, one PL 6000, one UEC, or one UMC is necessary for each control. They feature safety-relevant inputs/outputs, as well as ports for touch probes.

Accessories

Accessory	MANUALplus 620	Page
Electronic handwheels	<ul style="list-style-type: none"> • HR 180 panel-mounted handwheels for connection to position inputs, plus • HR 510, HR 510 FS portable handwheel, or • HR 520, HR 520 FS portable handwheel with display, or • HR 550 FS portable wireless handwheel with display, or • HR 130 panel-mounted handwheel 	26
Workpiece touch probes¹⁾	<ul style="list-style-type: none"> • TS 260 touch trigger probe with cable connection, or • TS 460 touch trigger probe with radio and infrared transmission, or • TS 750 touch trigger probe with cable connection • TS 150 touch trigger probe with cable connection • TS 740 touch trigger probe with infrared transmission 	
Tool touch probes¹⁾	With cuboid probe contact as accessory <ul style="list-style-type: none"> • TT 160 touch trigger probe, or • TT 460 touch trigger probe with radio or infrared transmission 	
Programming station²⁾	DataPilot MP 620 Control software for PCs for programming, archiving, and training <ul style="list-style-type: none"> • Full version with single user license or network license • Demo version (free of charge) 	
Snap-on keys	For controls and handwheels	29

¹⁾ For more information, refer to the *Touch Probes* brochure

²⁾ For more information, refer to the *Programming Station for Turning Controls* brochure

Software tools	MANUALplus 620	Page
PLCdesign¹⁾	PLC development software	60
TNCremo²⁾, TNCremoPlus²⁾³⁾	Data transfer software (TNCremoPlus with "live" screen)	65
ConfigDesign¹⁾	Software for configuring the machine parameters	56
TNCkeygen¹⁾	Software for enabling SIK options for a limited time, and for single-day access to the OEM area	18
TNCscope¹⁾	Software for data recording	57
TNCopt¹⁾	Software for putting digital control loops into service	57
IOconfig¹⁾	Software for configuring PLC I/O and fieldbus components	23
TeleService¹⁾³⁾	Software for remote diagnostics, monitoring, and operation	57
RemoTools SDK¹⁾	Function library for developing customized applications for communication with HEIDENHAIN controls	66
TNCtest¹⁾	Software for creation and execution of acceptance tests	58
TNCanalyzer¹⁾	Software for the analysis and evaluation of service files	58

¹⁾ Available to registered customers for download from the Internet

²⁾ Available to all customers (without registration) for download from the Internet

³⁾ Software release module required

Specifications

Specification	MANUALplus 620	Page
Axes	Max. 10 control loops, of which up to 6 can be configured as spindles	45
Axes	Up to 6 closed-loop linear axes X, Z, U, V, W: Standard Y: Option	
B axis	Option	
C1/C2 axis	Option	
Synchronized axes	✓	
PLC axes	✓	
Spindles	Up to 6 controlled spindles: Main spindle Counter spindle Driven tool	47 48
Speed	Max. 60 000 rpm (with option 49 max. 120 000 rpm) for motors with one pole pair	47
Operating mode switchover	✓	47
Position-controlled spindle	✓	47
Oriented spindle stop	✓	47
Gear shifting	✓	47
NC program memory	7.7 GB	16
Input resolution and display step		45
Linear axes	X axis: 0.5 μm (diameter 1 μm) U, V, W, Y, Z axes: 1 μm	
Rotary axes	B, C1/C2 axis: 0.001°	
Functional safety (FS)	With FS components, SPLC, and SKERN	41
For applications with up to	<ul style="list-style-type: none"> SIL 2 according to EN 61 508 Category 3, PL d as per EN ISO 13 849-1:2008 	
Interpolation		
Straight line	In 2 axes (maximum: ±100 m); in 3 main axes with software option 70	
Circular	In 2 axes (max. radius: 999 m); additional linear interpolation of the third axis with software option 55 or 70	
C1/C2 axis	Interpolation of the linear axes X and Z with the C1/C2 axis (software option 55)	
B axis	Interpolation of X, Z, Y, B, and C axis (software option 54)	
Axis feedback control		50
With following error	✓	
With feedforward	✓	
With jerk limiting	✓	45
Maximum feed rate	$\frac{60000 \text{ rpm}}{\text{No. of motor pole pairs}} \cdot \text{Screw pitch [mm]}$ at $f_{\text{PWM}} = 5000 \text{ Hz}$	45
Constant surface speed	✓	
Input	mm/min or mm/revolution	

Specification	MANUALplus 620	Page																		
Cycle times of main computer	MC	50																		
Block processing	3 ms																			
Cycle times of controller unit	CC/UEC/UMC	50																		
Path interpolation	3 ms	50																		
Fine interpolation	<i>Single-speed:</i> 0.2 ms <i>Double-speed:</i> 0.1 ms (software option 49)																			
Position controller	<i>Single-speed:</i> 0.2 ms <i>Double-speed:</i> 0.1 ms (software option 49)																			
Speed controller	<i>Single-speed:</i> 0.2 ms <i>Double-speed:</i> 0.1 ms (software option 49)																			
Current controller	<table border="0"> <tr> <td>f_{PWM}</td> <td>T_{INT}</td> </tr> <tr> <td>3.333 kHz</td> <td>150 μs</td> </tr> <tr> <td>4 kHz</td> <td>125 μs</td> </tr> <tr> <td>5 kHz</td> <td>100 μs</td> </tr> <tr> <td>6.666 kHz (software option 49)</td> <td>75 μs (software option 49)</td> </tr> <tr> <td>8 kHz (software option 49)</td> <td>62.5 μs (software option 49)</td> </tr> <tr> <td>10 kHz (software option 49)</td> <td>50 μs (software option 49)</td> </tr> <tr> <td>13.333 kHz (software option 49)</td> <td>37.5 μs (software option 49)</td> </tr> <tr> <td>16 kHz (software option 49)</td> <td>31.25 μs (software option 49)</td> </tr> </table>	f_{PWM}	T_{INT}	3.333 kHz	150 μs	4 kHz	125 μs	5 kHz	100 μs	6.666 kHz (software option 49)	75 μs (software option 49)	8 kHz (software option 49)	62.5 μs (software option 49)	10 kHz (software option 49)	50 μs (software option 49)	13.333 kHz (software option 49)	37.5 μs (software option 49)	16 kHz (software option 49)	31.25 μs (software option 49)	
f_{PWM}	T_{INT}																			
3.333 kHz	150 μs																			
4 kHz	125 μs																			
5 kHz	100 μs																			
6.666 kHz (software option 49)	75 μs (software option 49)																			
8 kHz (software option 49)	62.5 μs (software option 49)																			
10 kHz (software option 49)	50 μs (software option 49)																			
13.333 kHz (software option 49)	37.5 μs (software option 49)																			
16 kHz (software option 49)	31.25 μs (software option 49)																			
Permissible temperature range	Operation: In electrical cabinet: 5 °C to 40 °C In operating panel: 0 °C to 50 °C Storage: -20 to 60 °C																			

Interfacing to the machine

Interfacing to the machine	MANUALplus 620	Page
Error compensation	✓	55
Linear axis error	✓	55
Nonlinear axis error	✓	55
Backlash	✓	55
Reversal spikes during circular movement	✓	55
Hysteresis	✓	55
Thermal expansion	✓	55
Static friction	✓	55
Sliding friction	✓	55
Integrated PLC	✓	59
Program format	Statement list	59
Program input at the control	By screen keyboard	59
Program input via PC	✓	59
Symbolic PLC-NC interface	✓	59
PLC memory	4 GB	59
PLC cycle time	9 ms to 30 ms (adjustable)	59
PLC inputs/outputs	For the maximum configuration of the PLC system, see Page 40	22
PLC inputs, DC 24 V	Via PL, UEC, UMC	22
PLC outputs, DC 24 V	Via PL, UEC, UMC	22
Analog inputs ±10 V	Via PL	22
Inputs for PT 100 thermistors	Via PL	22
Analog outputs ±10 V	Via PL	22
PLC functions	✓	59
PLC soft keys	✓	60
PLC positioning	✓	60
PLC basic program	✓	62
Integration of applications		61
High-level language programming	Use of the Python programming language in conjunction with the PLC (software option 46)	61
User interfaces can be custom-designed	Creation of individualized user interfaces by the machine manufacturer with the Python programming language. Programs up to a memory limit of 10 MB are enabled in standard mode. More can be enabled via software option 46.	61

Interfacing to the machine	MANUALplus 620	Page
Commissioning and diagnostic aids		56
TNCdiag	Software for the analysis of status and diagnostic information of digital drive systems	56
TNCopt	Software for putting digital control loops into service	57
ConfigDesign	Software for creating the machine configuration	56
Integrated oscilloscope	✓	56
Trace function	✓	57
API DATA function	✓	57
Table function	✓	57
OLM (online monitor)	✓	57
Log	✓	57
TNCscope	✓	57
Bus diagnostics	✓	57
Data interfaces	✓	
Ethernet	2 x 1000BASE-T	64
USB	Rear: 4 x USB 3.0	64
Protocols		64
Standard data transmission	✓	64
Blockwise data transfer	✓	64
LSV2	✓	64

Function	Standard	Option	MANUALplus 620
DIN PLUS programming	✓		Programming in DIN 66025 format
	✓		Expanded command format (IF ... THEN ... ELSE ...)
	✓		Simplified geometry programming (calculation of missing data)
	✓		Powerful fixed cycles for area clearance, recessing, recess turning, and thread machining
		55	Powerful fixed cycles for drilling and milling with the C axis
		70	Powerful fixed cycles for drilling and milling with the Y axis
	✓		Subprograms
	✓		Technology functions for full-surface machining:
	✓		– Moving to a fixed stop
	✓		– Parting control
		131/132	– Spindle synchronization
		132	– Converting and mirroring
	✓		– Mechatronic tailstock
	✓		Programming with variables
	✓	8/9	Contour description with ICP
✓		Program verification graphics for workpiece blank and finished part	
✓		Turret assignment and other setup information in the DIN PLUS program	
✓	9	Conversion of smart.Turn units into DIN PLUS command sequences	
✓		Parallel programming	
✓		Parallel simulation	
Simulation	✓		Graphical simulation of the cycle process, or of the cycle, smart.Turn, or DIN PLUS program
	✓		Depiction of the tool paths as pencil-trace or cutting-path graphics; special identification of the rapid traverse paths
	✓		Machining simulation (2D material-removal graphics)
		55	Side or face view, or 2D view of cylindrical surface for verification of C-axis machining
	✓		Display of programmed contours
		54	View of the tilted plane (B-axis machining)
	✓		View of front face and YZ plane for verification of Y-axis machining
	✓		Three-dimensional rendering of the workpiece blank and finished part
✓	132	Simulation of mirrored contours for rear-face machining	
✓		Shifting and magnifying functions	
✓		Block scan in the simulation	
Program-run graphics	✓		Graphical depiction of the current machining operation
B-axis machining		54	Machining with the B axis
	✓		Tilting the working plane
		54	Rotating the machining position of the tool
	9+54	Simultaneous turning	
Eccentric machining		135	Cycles for eccentric turning and for the manufacture of oval and polygonal contours
		135	Superimpositioning of traversing movements of the X and Y axes synchronously to the rotational motion of the spindle
Machining time analysis	✓		Calculation of machining times and idle times
	✓		Consideration of the switching commands triggered by the CNC
	✓		Representation of time per individual cycle or per tool change
Monitoring functions		151	Load Monitoring: detect tool wear and tool breakage during machining
		155	Component Monitoring: monitor for the overloading and wear of machine components

Function	Standard	Option	MANUALplus 620
Tool database	✓		For 250 tools
		10	For 999 tools
	✓		Tool description can be entered for every tool
	✓		Automatic inspection of the tool-tip position relative to the machining contour
	✓		Compensation of the tool-tip position in the X/Y/Z plane
	✓		Fine compensation of tool via handwheel with application of compensation values in the tool table
	✓		Automatic tool-tip and cutter radius compensation
	✓		Tool monitoring for lifetime of the insert (tool tip) or the number of workpieces produced
		10	Tool monitoring with automatic tool change after end of tool life
	✓		Management of multipoint tools (multiple inserts or multiple reference points)
✓		Support of quick-change tool systems	
Technology database		8/9	Access to cutting data upon definition of workpiece material, cutting material, and the machining mode. The MANUALplus 620 distinguishes between 16 machining modes. Each combination of workpiece material and tool material includes the cutting speed, the main feed rate, the secondary feed rate, and the infeed for the 16 machining modes.
		8/9	Automatic determination of the machining modes based on the cycle or the machining unit
		8/9	The cutting data are entered in the cycle or in the unit as suggested values
		8/9	9 combinations of workpiece material and tool material (144 entries)
		10	62 combinations of workpiece material and tool material (992 entries)
User management	✓		Configurable tying of permissions to user roles – Login at the control with a user account – User-specific HOME folder for simplified data management – Role-based access to the control and the network data
Conversational languages	✓		English, German, Czech, French, Italian, Spanish, Portuguese, Dutch, Swedish, Danish, Finnish, Norwegian, Slovenian, Slovak, Polish, Hungarian, Russian (Cyrillic), Romanian, Turkish, Chinese (traditional and simplified), Korean

Software options

Option number	Option	Starting with NC-Software 548431-	ID	Comment	Page
0	Additional Axis 1	01	354540-01	Additional control loop 1	19
1	Additional Axis 2	01	353904-01	Additional control loop 2	19
2	Additional Axis 3	01	353905-01	Additional control loop 3	19
3	Additional Axis 4	01	367867-01	Additional control loop 4	19
4	Additional Axis 5	01	367868-01	Additional control loop 5	19
5	Additional Axis 6	01	370291-01	Additional control loop 6	19
6	Additional Axis 7	01	370292-01	Additional control loop 7	19
8	Teach-in	01	632226-01	Cycle programming <ul style="list-style-type: none"> Contour description with ICP Cycle programming Technology database with 9 combinations of workpiece materials and tool materials 	
9	smart.Turn	01	632227-01	smart.Turn <ul style="list-style-type: none"> Contour description with ICP Programming with smart.Turn Technology database with 9 combinations of workpiece materials and tool materials 	
10	Tools and Technology	01	632228-01	Tools and technology <ul style="list-style-type: none"> Tool database expanded to 999 entries Technology database expanded to 62 combinations of workpiece materials and tool materials Tool life monitoring with exchange tools 	
11	Thread Recutting	01	632229-01	Threads <ul style="list-style-type: none"> Thread recutting Handwheel superimposition during thread cutting 	
17	Touch Probe Functions	01	632230-01	Tool measurement and workpiece measurement <ul style="list-style-type: none"> Determining tool-setting dimensions with a tool touch probe Determining tool-setting dimensions with an optical gauge Automatic workpiece measurement with a workpiece touch probe 	
18	HEIDENHAIN DNC	01	526451-01	Communication with external PC applications over COM component	66
24	Gantry Axes	01	634621-01	Gantry axes in master-slave torque control	46
42	DXF Import	01	632231-01	DXF import: Import of DXF contours	
46	Python OEM Process	01	579650-01	Python application on the control	61
49	Double-Speed Axes	01	632223-01	Short control-loop cycle times for direct drives	51
54	B-Axis Machining	01	825742-01	B axis: Tilting the working plane, rotating the machining position of the tool	46
55	C-Axis Machining	01	633944-01	C-axis machining	47
63	TURN PLUS	01	825743-01	TURN PLUS automatic generation of smart.Turn programs	
70	Y-Axis Machining	01	661881-01	Y-axis machining	
77	4 Additional Axes	03	634613-01	4 additional control loops	19

Option number	Option	Starting with NC-Software 548431-	ID	Comment	Page
94	Parallel Axes	01	679676-01	Support of parallel axes (U, V, W) Combined display of principal axes and secondary axes	
101 - 130	OEM option	01	579651-01 to 579651-30	Options of the machine manufacturer	
131	Spindle Synchronism	01	806270-01	Synchronization (of two or more spindles)	48
132	Counter Spindle	01	806275-01	Counter spindle (spindle synchronism, rear-face machining)	47
133	Remote Desktop Manager	07	894423-01	Display and operation of external computer units (e.g., a Windows PC)	66
135	Synchronizing Functions	03	1085731-01	Expanded synchronization of axes and spindles	46
137	State Reporting	06	1232242-01	State Reporting Interface (SRI): Provision of operating conditions	57
143	Load Adapt. Control	01	800545-01	LAC: Load-dependent adaptation of control parameters	55
151	Load Monitoring	03	1111843-01	Monitoring of the tool load	54
155	Component Monitoring	07	1226833-01	Monitoring for component overloading and wear	54
160	Integrated FS: Basic	07	1249928-01	Enables functional safety and four safe control loops	41
161	Integrated FS: Full	07	1249929-01	Enables functional safety and maximum number of safe control loops	41
162	Add. FS Ctrl. Loop 1	07	1249930-01	Additional control loop 1	41
163	Add. FS Ctrl. Loop 2	07	1249931-01	Additional control loop 2	41
164	Add. FS Ctrl. Loop 3	07	1249932-01	Additional control loop 3	41
165	Add. FS Ctrl. Loop 4	07	1249933-01	Additional control loop 4	41
166	Add. FS Ctrl. Loop 5	07	1249934-01	Additional control loop 5	41
169	Add. FS Full	08	1319091-01	Enabling of all FS axis options or control loops. Options 160 and 162 to 166 must already be set.	41

HSCI control components

Main computer

Main computer

The **MC 8420T** main computer consists of:

- 15.6-inch multi-touch display with 1366 x 768 pixels
- CPU: Intel Celeron 1047, 1.4 GHz, dual-core
- Storage medium: CFR (CFast)
- RAM: 4 GB
- IP54 degree of protection (when installed)
- Compatible successor of the MC 7410T
- MANUALplus control panel
- HSCI interface to the controller unit and to other control components

To be ordered separately, and installed in the main computer by the OEM:

- **CFR** memory card with the NC software
- The **System Identification Key** (SIK) component holds the NC software license for enabling control loops and software options.

The following HSCI components are necessary for operation of the MANUALplus 620:

- MC main computer
- Controller unit
- **PLB 62xx** PLC I/O unit (system PL; integrated in UxC))
- Machine operating panel **MB 720T** or **MB 720T FS** or HSCI adapter **PLB 6001** or **PLB 600x FS** for connecting an OEM machine operating panel

Interfaces

For being used by the end user, the standard MC units are equipped with USB 3.0 and Ethernet interfaces. Connection to PROFINET IO or PROFIBUS DP is optionally possible via the individual additional modules or a combined PROFIBUS DP / PROFINET IO module.

Gen 3 labels

The different Gen 3 labels identify how control components can be deployed.

Gen 3 ready

Gen 3 ready: These components can be used in systems with Gen 3 drives (UVR 3xx, UM 3xx, CC 3xx) or in systems with a 1xx inverter system (UVR 1xx, UE 2xx, UR 2xx, CC 61xx).

Gen 3 exclusive

Gen 3 exclusive: These components can be used only in systems with Gen 3 drives (UVR 3xx, UM 3xx, CC 3xx).

Versions

The MC 8420T main computer is designed for direct installation into the operating panel. It contains a 15.6-inch multi-touch display with integrated operating panel. It is thus an extremely compact unit. The MC 8420T main computer is supported starting with NC software 548431-05.



MC 8420T

	Installation type	Storage medium	Processor	RAM	Power consumption*)	Mass	ID
MC 8420T	Operating panel	CFR	Intel Celeron 1047 1.4 GHz, dual-core	4 GB	≈ 43 W	≈ 6.7 kg	1213689-xx

*) Test conditions: Windows 7 (64-bit) operating system, 100 % processor loading, no load on interfaces, no fieldbus module

Software options Software options allow the performance of the MANUALplus 620 to be adapted to one's actual needs at a later time. The software options are described on page 14. They are enabled by entering keywords based on the SIK number and are saved in the SIK component. Please provide the SIK number when ordering new options.

Storage medium The storage medium is a CFR (CompactFlash Removable) compact flash memory card. It contains the NC software and is used to store NC and PLC programs. The storage medium is removable and must be ordered separately from the main computer.

This CFR uses the fast SATA protocol (CFast) for significantly shorter access times.

CFR CompactFlash, 30 GB
 Free PLC memory space ≈ 4 GB
 Free NC memory space ≈ 7.7 GB
 Export license not required ID 1075055-58
 (NC SW 548431-08)



CFR CompactFlash

SIK component The SIK component contains the **NC software license** for enabling control loops and software options. It gives the main computer an unambiguous ID code—the SIK number. The SIK component is ordered and shipped separately. It must be inserted into a slot provided for it in the MC main computer.



SIK component

The SIK component with the NC software license exists in different versions based on the enabled control loops and software options. Additional control loops can be enabled later by entering a keyword. HEIDENHAIN provides the keyword, which is based on the SIK number.


When ordering, please provide the SIK number of your control. When the keywords are entered in the control, they are saved in the SIK component, thereby enabling and activating the software options. Should servicing become necessary, the SIK component must be inserted into the replacement control in order to enable all of the required software options.

Master keyword (general key) For putting the MANUALplus 620 into service, there is a master keyword that enables all software options once for 90 days. After this period, the software options can be activated only with the correct keywords. The general key is activated via a soft key.

TNCkeygen (accessory) TNCkeygen is a collection of PC software tools for generating enabling keys for HEIDENHAIN controls for a limited period of time.

With the **OEM Key Generator**, you can generate enabling keys for software options by entering the SIK number, the software option to be enabled, the enabling period, and an OEM-specific password. This activation is limited to a period of 10 to 90 days. Each software option can be enabled only once; this is performed independently of the master keyword.

The **OEM daily key generator** generates an enabling key for the protected OEM area, thus granting the user access on the day it is generated.

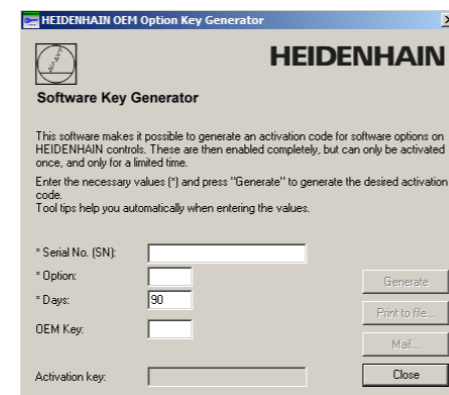

NC software license and enabling of control loops based on the CC

There are always three control loops enabled in the basic version. The controller unit must be designed for the corresponding number of activated control loops. Maximum numbers:

- UEC 3x4: 4 control loops
- UEC 3x4: 5 control loops
- CC 302: 2 control loops
- CC 308: 8 control loops
- CC 310: 10 control loops

You can find the usual SIK combinations in the following table. Other versions are available upon request.

SIK with software license and enabling for		SIK
Control loops	Included options	
3	<ul style="list-style-type: none"> • Teach-in (option 8) • smart.Turn (option 9) • Thread Recutting (option 11) • C-Axis Machining (option 55) 	ID 733604-53
3	<ul style="list-style-type: none"> • Teach-in (option 8) 	ID 733604-55
4	<ul style="list-style-type: none"> • Additional Axis 1 (option 0) • Teach-in (option 8) • C-Axis Machining (option 55) 	ID 733604-56

Enabling further control loops

Further control loops can be enabled either as groups or individually. The combination of control-loop groups and individual control loops makes it possible to enable any number of control loops. No more than **10 control loops** are possible.

Control-loop groups	Software option	
4 additional control loops	77	ID 634613-01

Individual control loops	Software option	
1st additional control loop	0	ID 354540-01
2nd additional control loop	1	ID 353904-01
3rd additional control loop	2	ID 353905-01
4th additional control loop	3	ID 367867-01
5th additional control loop	4	ID 367868-01
6th additional control loop	5	ID 370291-01
7th additional control loop	6	ID 370292-01

SIK for purely analog drive systems

A special SIK is available for systems with purely analog drives on the basis of the HSCI platform.

Please note: The SIK can be used only with NC software 548431-04 or later.

The following HSCI components are required:

- MC main computer
- CC controller unit
- SPI module CMA-H 04-04-00
- PLB 6xxx
- MB 720T machine operating panel or PLB 6001 (HSCI adapter for OEM machine operating panel)

SIK with software license and enabling for	SIK
4 control loops, including options: <ul style="list-style-type: none"> • Teach-in (option 8) • smart.Turn (option 9) • Thread Recutting (option 11) • C-Axis Machining (option 55) 	1158453-51

Machine operating panel

MB 720T

Gen3 ready

- Supply voltage: DC 24 V/≈ 4 W
- 36 exchangeable snap-on keys with status LEDs, definable as desired via the PLC
- Operating elements: Keys preassigned through the PLC basic program: Control voltage on¹⁾; NC start; NC stop; emergency stop; 4 axis keys; rapid traverse key; electronic handwheel, permissive key, tool change key, switch gear stage, spindle right and left; spindle stop; jog spindle to right and left; spindle positioning; clamp spindle; spindle switchover; chip removal; chip removal backwards; tool change right and left; unlock door; coolant keys
- Spindle-speed and feed-rate override potentiometers
- Two holes for additional keys or keylock switches
- MB 720T: 8 free PLC inputs and 8 free PLC outputs
MB 720T FS: 4 free FS inputs and 8 free PLC outputs; additional dual-channel FS inputs for emergency stop and permissive keys of the HR handwheel
- Connection for HR handwheel
- HSCI interface

¹⁾ Illuminated keys, addressable via PLC

MB 720T ID 1043707-xx
MB 720T FS ID 1280932-xx
 Mass ≈ 1.0 kg



MB 720T

PL 6000 PLC input/output systems with HSCI

PL 6000

The PLC inputs and outputs are available via external modular PL 6000 PLC input/output systems. They consist of a basic module and one or more input/output modules. A total maximum of 1000 inputs/outputs is supported. The PL 6000 units are connected to the MC main computer via the HSCI interface. The PL 6000 units are configured with the IOconfig PC software.



PLB 62xx

Basic modules

Basic modules with an **HSCI interface** exist for 4, 6, 8, and 10 modules. Fastening is performed on standard NS 35 rails (DIN 46227 or EN 50022).

Supply voltage	DC 24 V
Power consumption ¹⁾	≈ 48 W at DC 24 V NC ≈ 21 W at DC 24 V PLC
Mass	≈ 0.36 kg (bare)

¹⁾ PLB 6xxx completely filled, incl. TS, TT

System PL with EnDat support

- Required once for each control system (except with UxC)
- Connections for TS and TT touch probes
- TS and TT touch probes with EnDat interface are supported
- *Without FS*: 12 free inputs, 7 free outputs
- *With FS*: 6 free FS inputs, 2 free FS outputs
- Functional safety (FS) is enabled via SIK options 160 to 166
- Slots are equipped with cover strips

Gen3 ready

PLB 6204	For 4 I/O modules	ID 1129809-xx
PLB 6206	For 6 I/O modules	ID 1129812-xx
PLB 6208	For 8 I/O modules	ID 1129813-xx
PLB 6210	For 10 I/O modules	ID 1278136-xx

Gen3 exclusive

PLB 6210 FS	For 10 I/O modules	ID 1290089-xx
--------------------	--------------------	---------------

Expansion PL

Gen3 ready

For connection to the system PL to increase the number of PLC inputs/outputs

PLB 6104	For 4 I/O modules	ID 1129799-xx
PLB 6106	For 6 I/O modules	ID 1129803-xx
PLB 6108	For 8 I/O modules	ID 1129804-xx
PLB 6104 FS	For 4 I/O modules	ID 1129796-xx
PLB 6106 FS	For 6 I/O modules	ID 1129806-xx
PLB 6108 FS	For 8 I/O modules	ID 1129807-xx

Up to seven PLB 6xxx modules can be connected to the control.

I/O modules

Gen3 ready

There are I/O modules with digital and analog inputs and outputs.

PLD-H 16-08-00	I/O module with 16 digital inputs and 8 digital outputs	ID 594243-xx
PLD-H 08-16-00	I/O module with 8 digital inputs and 16 digital outputs	ID 650891-xx
PLD-H 08-04-00 FS	I/O module with 8 digital FS inputs and 4 digital FS outputs	ID 598905-xx
PLD-H 04-08-00 FS	I/O module with 4 digital FS inputs and 8 digital FS outputs	ID 727219-xx
PLD-H 04-04-00 HSLs FS	I/O module with 4 digital FS inputs and 4 high-side/low-side FS outputs	ID 746706-xx

Total current	Outputs 0 to 7: ≤ 2 A per output (≤ 8 A simultaneously)
Power output	Max. 200 W
Mass	≈ 0.2 kg

PLA-H 08-04-04	Analog module for PL 6xxx with <ul style="list-style-type: none"> • 8 analog inputs, ±10 V • 4 analog outputs, ±10 V • 4 analog inputs for PT 100 thermistors 	ID 675572-xx
Mass	≈ 0.2 kg	

I/O module for axis release

Gen3 exclusive

Axis-release module for external safety. In combination with the PLB 620x without FS

PAE-H 08-00-01	I/O module for enabling 8 axis groups	ID 1203881-xx
-----------------------	---------------------------------------	---------------

IOconfig (accessory)

PC software for configuring HSCI and PROFIBUS components

Accessories

HSCI adapter for OEM machine operating panel


PLB 600x

Gen3 ready

The PLB 600x HSCI adapter is required in order to connect an OEM-specific machine operating panel to the MANUALplus 620.

- HSCI interface
- Connection for HR handwheel
- Inputs and outputs for keys and key illumination
 - PLB 6001:* Terminals for 72 PLC inputs / 40 PLC outputs
 - PLB 6001 FS:* Terminals for 36 FS inputs / 40 PLC outputs
 - PLB 6002 FS:* Terminals for 4 FS inputs, 64 PLC inputs, and 40 PLC outputs
- Screw fastening or top-hat-rail mounting
- Configuration of the PLC inputs/outputs with the IOconfig PC software

PLB 6001	ID 668792-xx
PLB 6001 FS	ID 722083-xx
PLB 6002 FS	ID 1137000-xx
Mass	≈ 1.2 kg

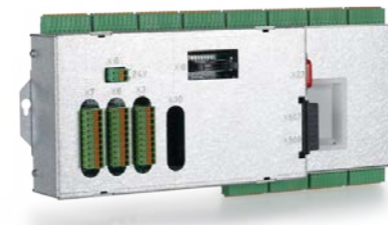

PLB 6001

Additional modules

Gen3 ready

Module for analog axes

Digital drive designs sometimes also require analog axes or spindles. The additional module CMA-H 04-04-00 (Controller Module Analog—HSCI) makes it possible to integrate analog drive systems in an HSCI system.

The CMA-H is integrated into the HSCI control system via a slot on the underside of the CC or UEC. Every controller unit has slots for two boards. The CMA-H does not increase the total number of available axes: every analog axis used reduces the number of available digital control loops by one. Analog control loops also need to be enabled on the SIK. The analog control-loop outputs can be accessed only via the NC, not via the PLC.

Additional module for analog axes/spindles:

- Expansion board for the CC or UEC controller units
- 4 analog outputs, ±10 V for axes/spindle
- Spring-type plug-in terminals

CMA-H 04-04-00 ID 688721-xx



CMA-H 04-04-00

Fieldbus systems

An expansion board can be used to provide the MANUALplus 620 with a PROFIBUS or PROFINET interface at any time. The modules are integrated into the control system through a slot on the MC. This makes the connection to an appropriate fieldbus system as a master possible. As of version 3.0, the interface is configured with IOconfig.

PROFIBUS DP module

- Expansion board for the MC main computer
- Connection for 9-pin D-sub connector (female) to X121

PROFIBUS DP ID 828539-xx



PROFIBUS DP module

PROFINET IO module

- Expansion board for the MC main computer
- RJ45 connection at X621 and X622

PROFINET IO ID 828541-xx



PROFINET IO module

Combined PROFIBUS DP/PROFINET IO module

- Expansion board for the MC main computer
- RJ45 connection at X621 (PROFINET IO) and M12 connector at X121 (PROFIBUS DP)
- Additionally connectable terminating resistor for PROFIBUS DP with front LED

PROFIBUS DP and PROFINET IO ID 1160940-xx



Combined module

Electronic handwheels

Gen3 ready

Overview The standard MANUALplus 620 supports the use of electronic handwheels. The MANUALplus 620 offers various possibilities.

Connection possibilities

- Connection to position encoder inputs
- Connection to serial handwheel inputs

Quantity It is possible to operate multiple handwheels at the serial handwheel inputs (one handwheel via the handwheel input of the main computer and one handwheel each on HSCI machine operating panels or PLB 6001 or PLB 600x FS HSCI adapters; for the maximum possible number, see Page 40) of the MANUALplus 620.

- HR 550 FS wireless handwheel or
- HR 510, HR 510 FS, HR 520, HR 520 FS portable handwheel or
- HR 130 panel-mounted handwheel

Examples and limitations On cycle lathes, for example, two HR 180 and one HR 510 are in use. On CNC lathes, usually only one HR 130 or one HR 510 is used. The mixed operation of handwheels with and without display is not possible. Only one serial handwheel can be active. Handwheels with functional safety (FS) are cross-circuit-proof due to special permissive-button logic.

HR 510 Portable electronic handwheel with:

- Keys for actual-position capture and the selection of five axes
- Keys for traverse direction and three preset feed rates
- Three keys for machine functions (see below)
- Emergency stop button and two permissive buttons (24 V)
- Magnetic holding pads

All keys are designed as snap-on keys and can be replaced with other symbols (see *Overview for the HR 510 in Snap-on keys for the HR*).

	Keys	Without detent	With detent
HR 510	NC start/stop, spindle start (for basic PLC program)	ID 1119971-xx	ID 1120313-xx
	FCT A, FCT B, FCT C	ID 1099897-xx	–
	Spindle right/left/stop	ID 1184691-xx	–
HR 510 FS	NC start/stop, spindle start (for basic PLC program)	ID 1120311-xx	ID 1161281-xx
	FCT A, FCT B, FCT C	–	ID 1120314-xx
	Spindle start, FCT B, NC start	–	ID 1119974-xx

Mass ≈ 0.6 kg



HR 510

HR 520

Portable electronic handwheel with:

- Display for operating mode, actual position value, programmed feed rate and spindle speed, error messages
- Override potentiometers for feed rate and spindle speed
- Selection of axes via keys or soft keys
- Actual position capture
- NC start/stop
- Spindle on/off
- Keys for continuous traverse of the axes
- Soft keys for machine functions of the machine manufacturer
- Emergency stop button

	Without detent	With detent
HR 520	ID 670302-xx	ID 670303-xx
HR 520 FS	ID 670304-xx	ID 670305-xx

Mass ≈ 1 kg

Holder for HR 520

For attaching to a machine

ID 591065-xx

HR 550 FS

Electronic handwheel with wireless transmission. Display, operating elements, and functions are like those of the HR 520

In addition:

- Functional safety (FS)
- Radio transmission range of up to 20 m (depending on environment)

HR 550 FS	Without detent	ID 1200495-xx
	With detent	ID 1183021-xx

Replacement battery	For HR 550 FS	ID 623166-xx
----------------------------	---------------	--------------



HR 520



HR 550 FS with HRA 551 FS

HRA 551 FS

Handwheel holder for HR 550 FS

- For docking the HR 550 FS onto the machine
- Integrated battery charger for HR 550 FS
- Connections to the control and the machine
- Integrated transceiver
- HR 550 FS magnetically held to front of HRA 551 FS

HRA 551 FS	ID 1119052-xx
Mass	≈ 1.0 kg

For more information, see the *HR 550 FS* Product Information document.

Connecting cables

	HR 510	HR 510 FS	HR 520	HR 520 FS	HR 550 FS with HRA 551 FS	
Connecting cable (spiral cable) to HR (3 m)	–	–	✓	✓	–	ID 312879-01
	✓	✓	–	–	–	ID1117852-03
Connecting cable with metal armor	–	–	✓	✓	–	ID 296687-xx
	✓	✓	–	–	–	ID 1117855-xx
Connecting cable without metal armor	–	–	✓	✓	✓ (max. 2 m)	ID 296467-xx
	✓	✓	–	–	–	ID 1117853-xx
HR adapter cable to MC, straight connector	✓	✓	✓	✓	✓ ¹⁾	ID 1161072-xx
HR adapter cable to MC, angled connector (1 m)	✓	✓	✓	✓	✓ ¹⁾	ID 1218563-01
Extension cable to adapter cable	✓	✓	✓	✓	✓ ¹⁾	ID 281429-xx
Adapter cable for HRA to MC	–	–	–	–	✓ ²⁾	ID 749368-xx
Extension cable to adapter cable	–	–	–	–	✓ ²⁾	ID 749369-xx
Adapter connector for handwheels without functional safety	✓	–	✓	–	–	ID 271958-03
Adapter connector for handwheels with functional safety	–	✓	–	✓	✓	ID 271958-05

¹⁾ For maximum cable lengths of 20 m between the MB and HRA 551 FS
²⁾ For maximum cable lengths of 50 m between the MB and HRA 551 FS

See also *Cable overview* on "Accessories".

HR 180

Panel-mounted handwheel with ergonomic control knob for connection to a position encoder input.

HR 180 With detent ID 540940-08
 Mass ≈ 0.7 kg



HR 180

HR 130

Panel-mounted handwheel with ergonomic control knob. It is attached to the MB 720T either directly or via an extension cable.

HR 130 Without detent ID 540940-03
 With detent ID 540940-01
 Mass ≈ 0.7 kg



HR 130

Snap-on keys for handwheels













































Snap-on keys

The snap-on keys make it easy to replace the key symbols, thus allowing the HR handwheel can be adapted to different requirements. The snap-on keys are available in packs of five keys.

Overview for HR 520, HR 520 FS, and HR 550 FS

Axis keys	Orange	Gray	Machine functions	Spindle functions	Other keys
Orange	A ID 330816-42	X ID 330816-24	U ID 330816-43	IV ID 330816-37	
	B ID 330816-26	Y ID 330816-36	V ID 330816-38		
	C ID 330816-23	Z ID 330816-25	W ID 330816-45		
Gray	A- ID 330816-95	V+ ID 330816-69	X- ID 330816-0W	Y+ ID 330816-0R	
	A+ ID 330816-96	W- ID 330816-0G	X+ ID 330816-0V	Y- ID 330816-0D	
	B- ID 330816-97	W+ ID 330816-0H	X- ID 330816-0N	Y+ ID 330816-0E	
	B+ ID 330816-98	IV- ID 330816-71	X+ ID 330816-0M	Z- ID 330816-65	
	C- ID 330816-99	IV+ ID 330816-72	Y- ID 330816-67	Z+ ID 330816-66	
	C+ ID 330816-0A	X- ID 330816-63	Y+ ID 330816-68	Z- ID 330816-19	
	U- ID 330816-0B	X+ ID 330816-64	Y- ID 330816-21	Z+ ID 330816-16	
	U+ ID 330816-0C	X- ID 330816-18	Y+ ID 330816-20	Z- ID 330816-0L	
	V- ID 330816-70	X+ ID 330816-17	Y- ID 330816-0P	Z+ ID 330816-0K	
	SPEC FCT ID 330816-0X	FN 3 ID 330816-75	FN 3 ID 330816-0T	FN 3 ID 330816-86	
	SPEC FCT Black ID 330816-1Y	FN 4 ID 330816-76	FN 4 ID 330816-81	FN 4 ID 330816-87	
	FCT A Black ID 330816-30	FN 5 ID 330816-77	FN 5 ID 330816-82	FN 5 ID 330816-88	
FCT B Black ID 330816-31	FN 6 ID 330816-78	FN 6 ID 330816-83	FN 6 ID 330816-94		
FCT C Black ID 330816-32	FN 7 ID 330816-79	FN 7 ID 330816-84	FN 7 ID 330816-0U		
FN 1 ID 330816-73	FN 8 ID 330816-80	FN 8 ID 330816-89	FN 8 ID 330816-91		
FN 2 ID 330816-74	FN 9 ID 330816-0S	FN 9 ID 330816-85	FN 9 ID 330816-3L		
Spindle functions	Q0 Red ID 330816-08	Q0 ID 330816-40	Q0 Red ID 330816-47	Q0 ID 330816-48	
	Q1 Green ID 330816-09	Q1 ID 330816-41	Q1 Green ID 330816-46	Q1 ID 385530-5X	
Other keys	Black ID 330816-01	Red ID 330816-50	Red ID 330816-90	Red ID 330816-93	
	Gray ID 330816-61	Black ID 330816-33	Black ID 330816-27	Black ID 330816-0Y	
	NC 1 Green ID 330816-11	Black ID 330816-34	Black ID 330816-28	Black ID 330816-4M	
	NC 0 Red ID 330816-12	Black ID 330816-13	Black ID 330816-29	Black ID 330816-3M	
	Green ID 330816-49	Green ID 330816-22	Green ID 330816-92	Green ID 330816-3N	

Overview for HR 510 and HR 510 FS


























































































Axis keys Orange	 A	ID 1092562-02	 X	ID 1092562-05	 U	ID 1092562-36	 IV	ID 1092562-08
	 B	ID 1092562-03	 Y	ID 1092562-06	 V	ID 1092562-09		
	 C	ID 1092562-04	 Z	ID 1092562-07	 W	ID 1092562-37		
Gray	 X+	ID 1092562-28	 Y-	ID 1092562-31	 IV+	ID 1092562-24	 V-	ID 1092562-27
	 X-	ID 1092562-29	 Z+	ID 1092562-32	 IV-	ID 1092562-25		
	 Y+	ID 1092562-30	 Z-	ID 1092562-33	 V+	ID 1092562-26		
Machine functions	 FCT A	Black ID 1092562-14	 FCT B	Black ID 1092562-15	 FCT C	Black ID 1092562-16		ID 1092562-42
		ID 1092562-43		ID 1092562-44				
Spindle functions	 ID 1092562-18	ID 1092562-18	 ID 1092562-19	ID 1092562-19	 ID 1092562-22	Green ID 1092562-22	 ID 1092562-17	Red ID 1092562-17
	 ID 1092562-38	Red ID 1092562-38	 ID 1092562-41	ID 1092562-41				
Other keys	 ID 1092562-01	Black ID 1092562-01	 ID 1092562-23	Green ID 1092562-23	 ID 1092562-13	ID 1092562-13	 ID 1092562-35	ID 1092562-35
	 ID 1092562-20	Green ID 1092562-20	 ID 1092562-11	ID 1092562-11	 ID 1092562-10	Black ID 1092562-10	 ID 1092562-39	Gray ID 1092562-39
	 ID 1092562-21	Red ID 1092562-21	 ID 1092562-12	ID 1092562-12	 ID 1092562-34	ID 1092562-34	 ID 1092562-40	Orange ID 1092562-40

Snap-on keys for the control

Snap-on keys

The snap-on keys make it easy to replace the key symbols, thus allowing the keyboard to be adapted to different requirements. The snap-on keys are available in packs of five keys.

Overview of control keys

Keys Orange	 V	ID 679843-31	 A	ID 679843-54	 X	ID 679843-C8	 U	ID 679843-D4
	 IV	ID 679843-32	 W	ID 679843-55	 B	ID 679843-C9		
	 Z	ID 679843-53	 C	ID 679843-88	 Y	ID 679843-D3		
Gray	 X+	ID 679843-03	 VI+	ID 679843-13	 Y+	ID 679843-93	 Z+	ID 679843-B9
	 X-	ID 679843-04	 VI-	ID 679843-14	 Y-	ID 679843-94	 Z-	ID 679843-C1
	 Y+	ID 679843-05	 Y-	ID 679843-43	 B-	ID 679843-B1	 X-	ID 679843-C2
	 Y-	ID 679843-06	 Y+	ID 679843-44	 B+	ID 679843-B2	 X+	ID 679843-C3
	 Z+	ID 679843-07	 C+	ID 679843-67	 U-	ID 679843-B3	 X+	ID 679843-C4
	 Z-	ID 679843-08	 C-	ID 679843-68	 U+	ID 679843-B4	 X-	ID 679843-C5
	 IV+	ID 679843-09	 A+	ID 679843-69	 Y-	ID 679843-B5	 X-	ID 679843-D9
	 IV-	ID 679843-10	 A-	ID 679843-70	 Y+	ID 679843-B6	 X+	ID 679843-E1
	 V+	ID 679843-11	 Z+	ID 679843-91	 W-	ID 679843-B7		
	 V-	ID 679843-12	 Z-	ID 679843-92	 W+	ID 679843-B8		
Machine functions	 ID 679843-01	ID 679843-01	 ID 679843-30	ID 679843-30	 ID 679843-74	ID 679843-74	 ID 679843-C6	ID 679843-C6
	 ID 679843-02	ID 679843-02	 ID 679843-40	ID 679843-40	 ID 679843-76	ID 679843-76	 ID 679843-C7	Black ID 679843-C7
	 ID 679843-16	ID 679843-16	 ID 679843-56	Green ID 679843-56	 ID 679843-95	Black ID 679843-95	 ID 679843-D6	SPEC FCT ID 679843-D6
	 ID 679843-22	ID 679843-22	 ID 679843-57	Red ID 679843-57	 ID 679843-96	Black ID 679843-96	 ID 679843-E3	ID 679843-E3
	 ID 679843-23	ID 679843-23	 ID 679843-59	ID 679843-59	 ID 679843-A1	Black ID 679843-A1	 ID 679843-E4	FCT RC ID 679843-E4
	 ID 679843-24	ID 679843-24	 ID 679843-60	ID 679843-60	 ID 679843-A2	ID 679843-A2	 ID 679843-E6	ID 679843-E6
	 ID 679843-25	ID 679843-25	 ID 679843-61	ID 679843-61	 ID 679843-A3	ID 679843-A3	 ID 679843-E7	ID 679843-E7
	 ID 679843-26	ID 679843-26	 ID 679843-62	ID 679843-62	 ID 679843-A4	ID 679843-A4	 ID 679843-E8	ID 679843-E8
	 ID 679843-27	ID 679843-27	 ID 679843-63	ID 679843-63	 ID 679843-A5	ID 679843-A5		
	 ID 679843-28	ID 679843-28	 ID 679843-64	ID 679843-64	 ID 679843-A6	ID 679843-A6		
	 ID 679843-29	ID 679843-29	 ID 679843-73	ID 679843-73	 ID 679843-A9	ID 679843-A9		

Spindle functions

	ID 679843-18		ID 679843-47		Red ID 679843-52		ID 679843-99
	ID 679843-19		ID 679843-48		ID 679843-65		Green ID 679843-D8
	ID 679843-20		ID 679843-49		Green ID 679843-71		ID 679843-F2
	ID 679843-21		ID 679843-50		ID 679843-72		
	ID 679843-46		ID 679843-51		Red ID 679843-89		

Other keys


	ID 679843-15		ID 679843-39		ID 679843-97		Black ID 679843-E2
	ID 679843-17		ID 679843-41		ID 679843-98		ID 679843-E5
	Gray ID 679843-33		ID 679843-42		ID 679843-A7		ID 679843-F3
	Black ID 679843-34		Red ID 679843-45		ID 679843-A8		ID 679843-F4
	Orange ID 679843-35		ID 679843-58		Black ID 679843-D1		ID 679843-F5
	ID 679843-36		ID 679843-66		Black ID 679843-D2		ID 679843-F6
	ID 679843-37		ID 679843-75		ID 679843-D5		
	ID 679843-38		Green ID 679843-90		Red ID 679843-D7		

Special keys


Snap-on keys can also be made with special key symbols for special applications. The laser labeling differs in appearance from the labeling of the standard keys. If you need keys for special applications, please consult your contact person at HEIDENHAIN.

Cable overview


Control system with CC or UEC

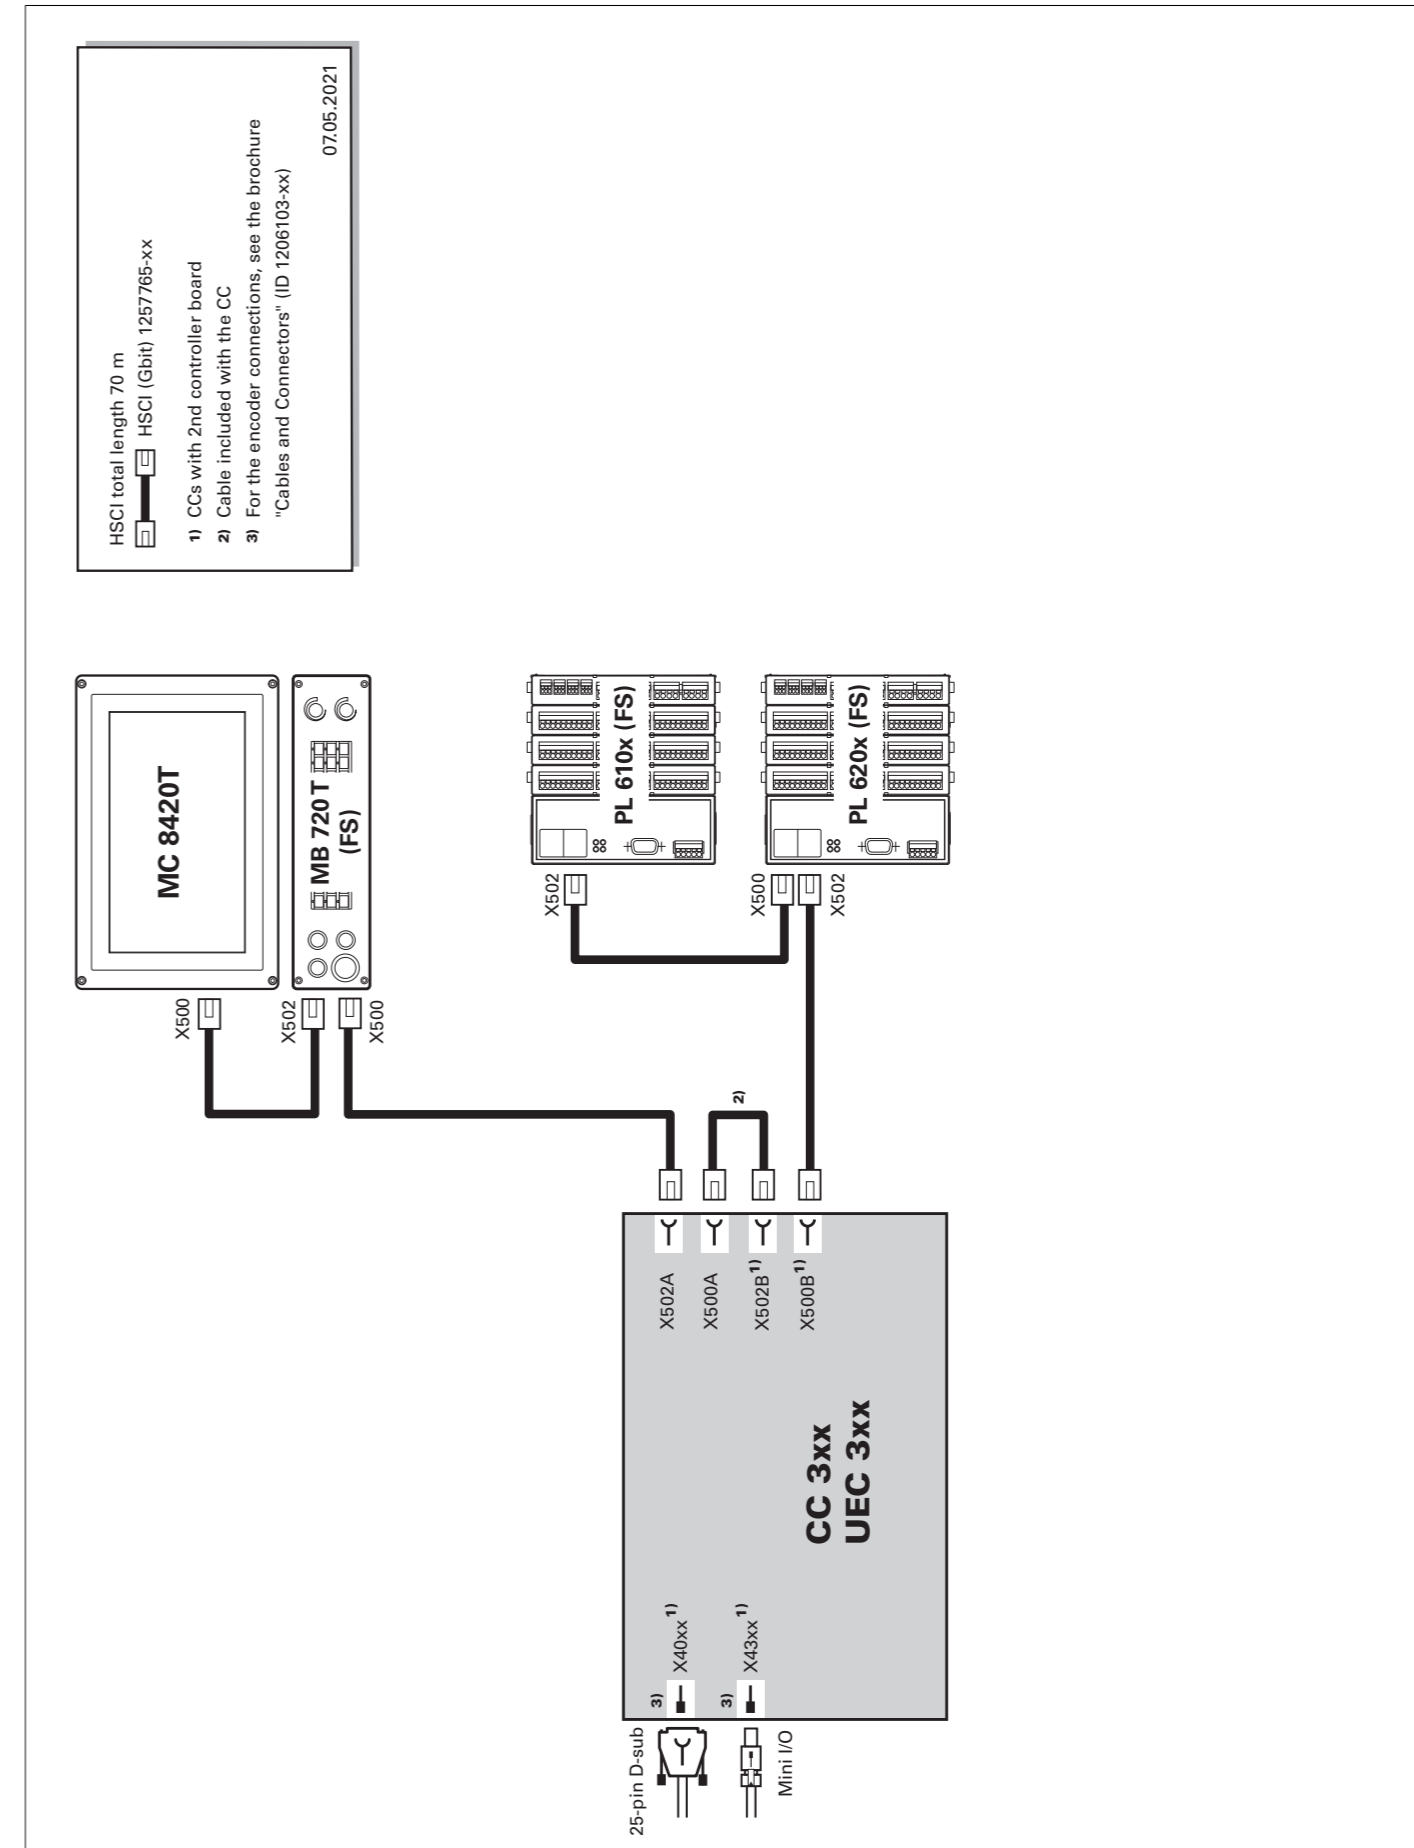


Inverters (multi-row)

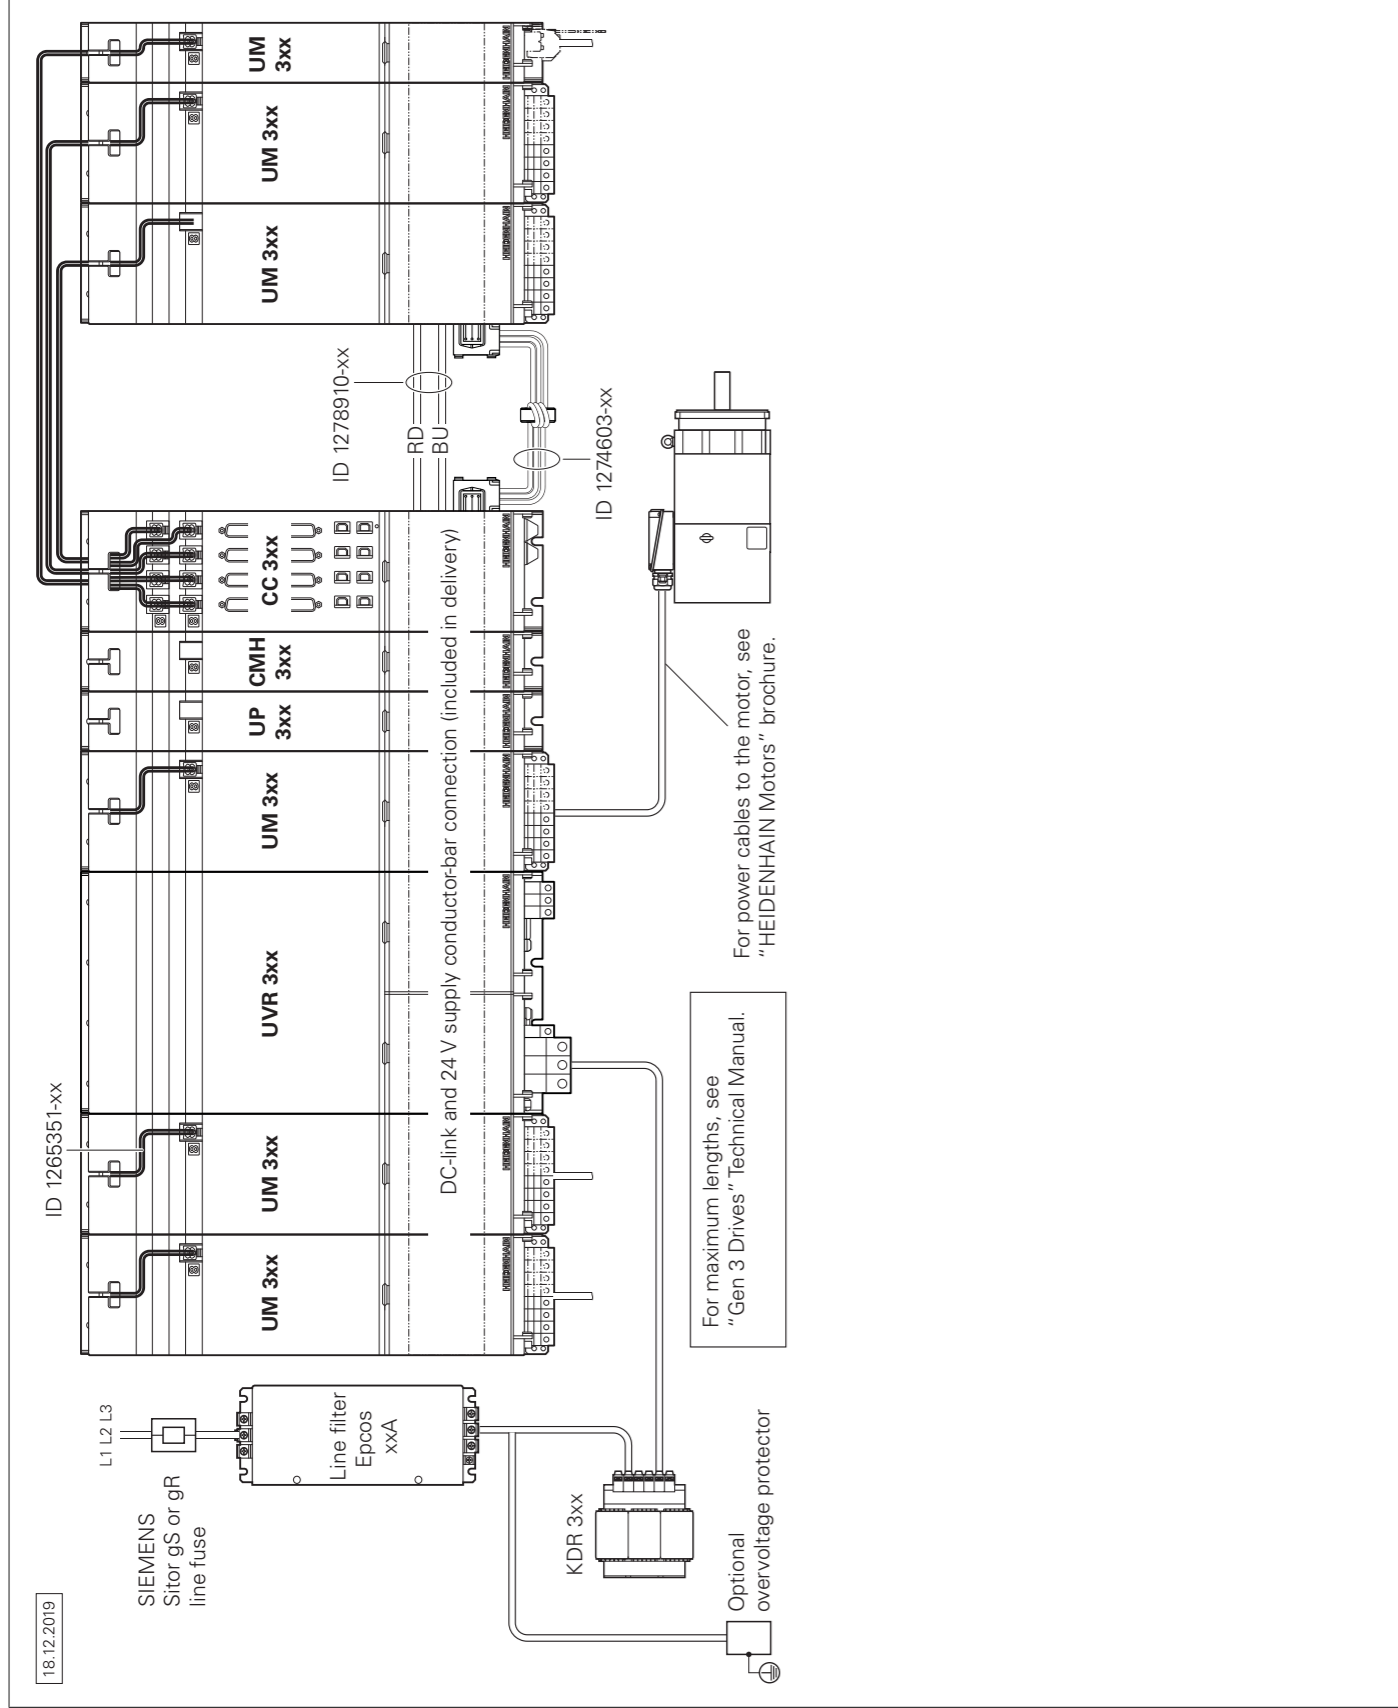

UEC 3xx (FS)

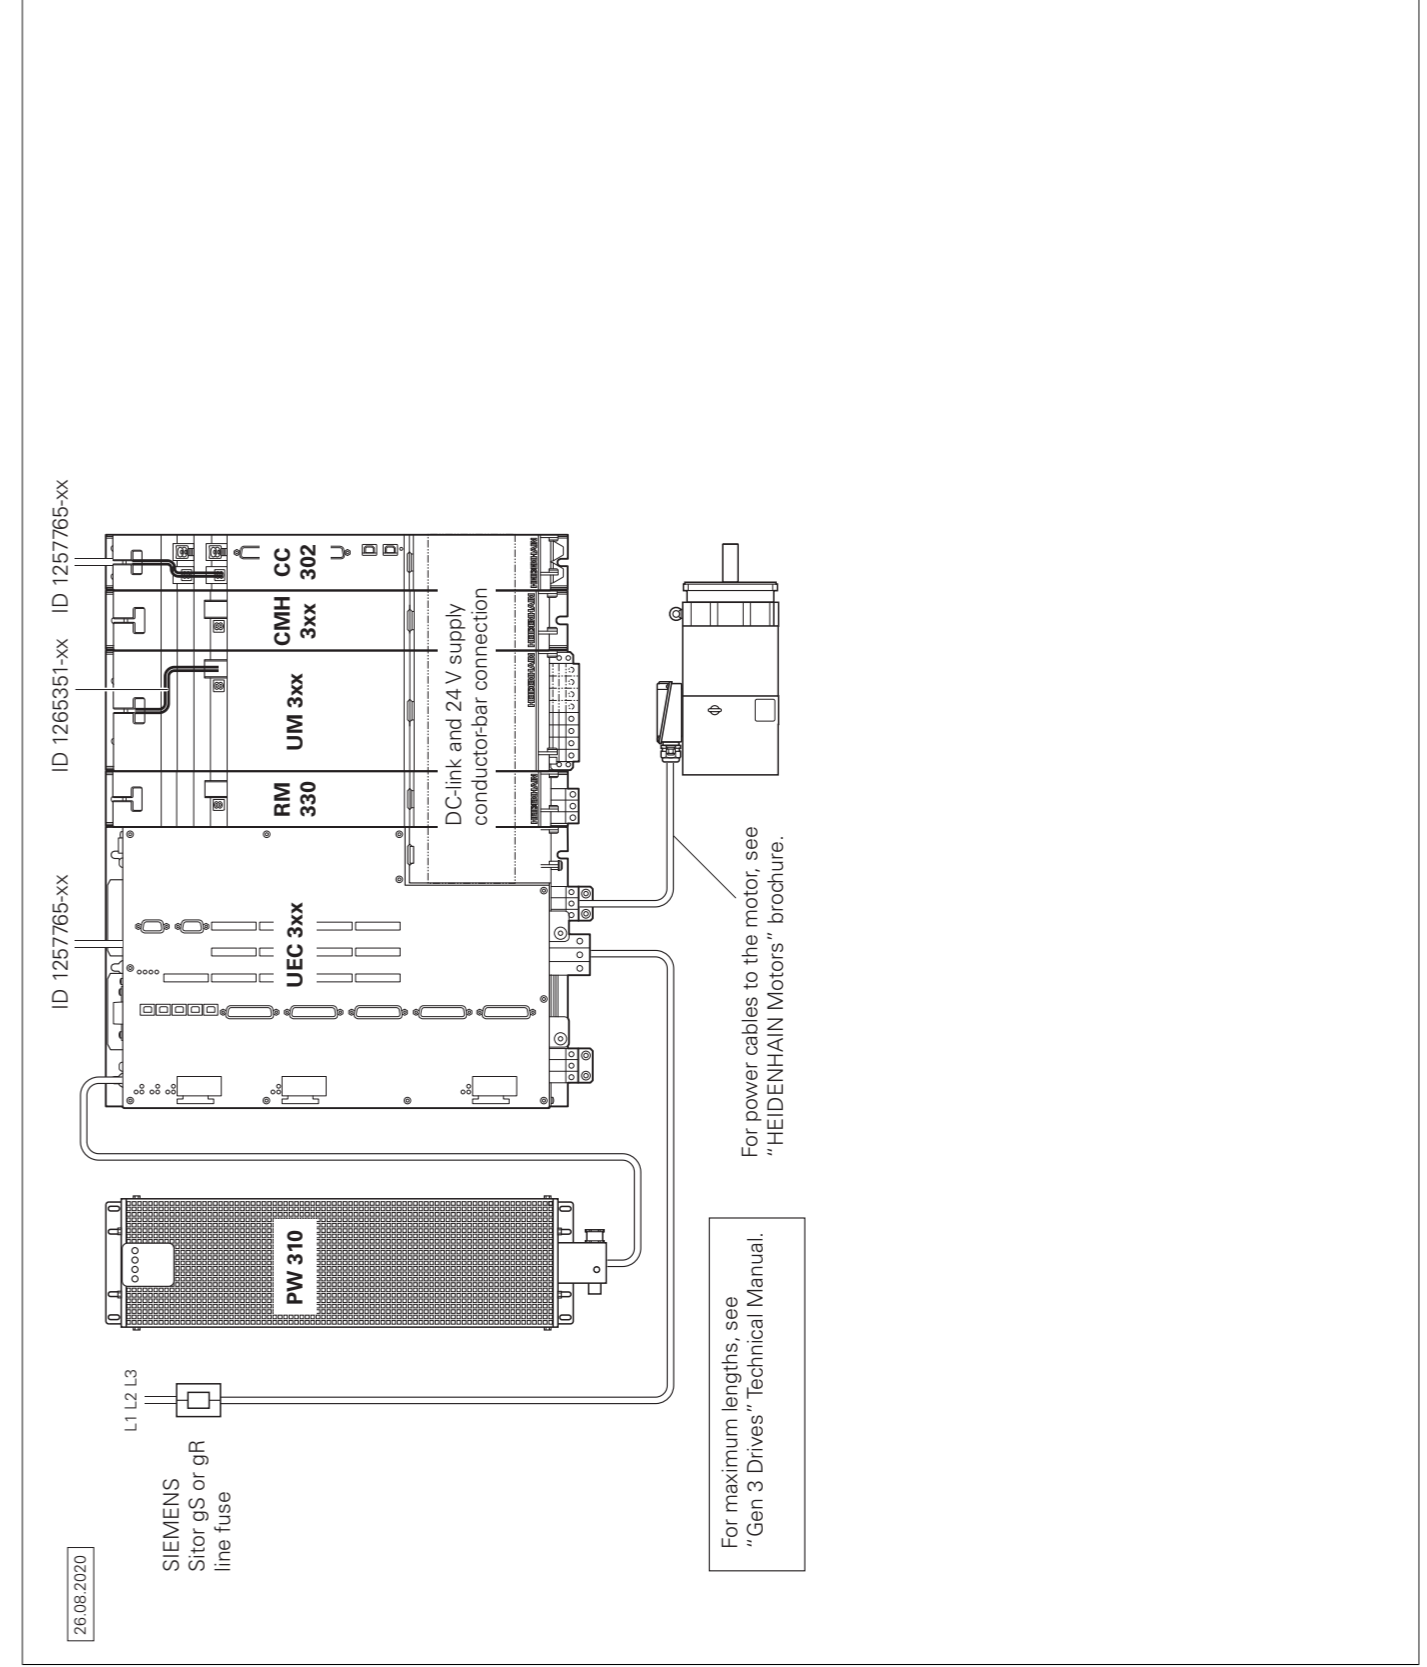

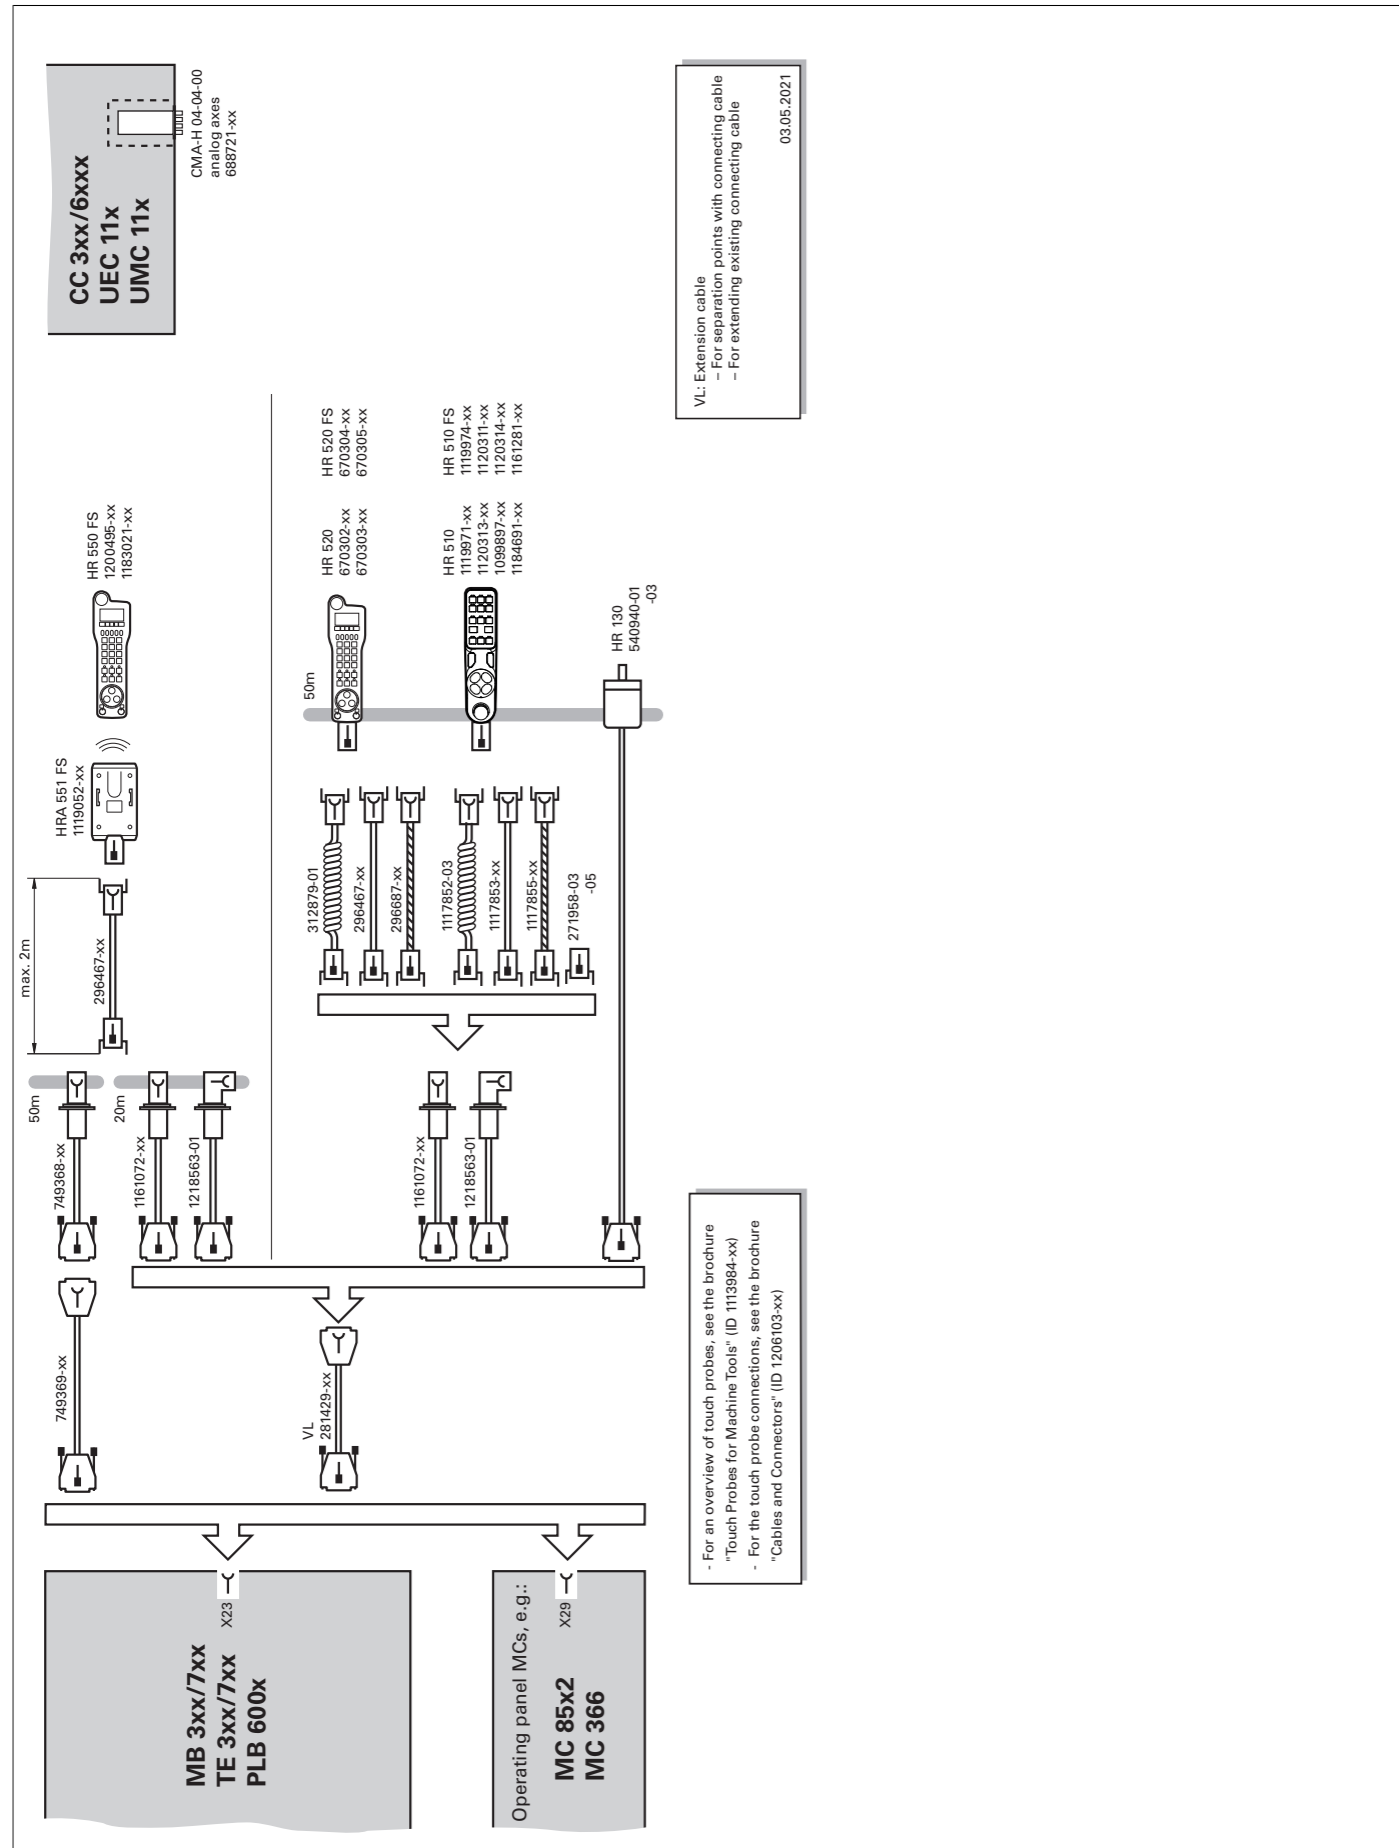

Technical description

Digital control design

Uniformly digital

In the uniformly digital control design from HEIDENHAIN, all of the components are connected with each other via purely digital interfaces. A high degree of availability for the entire system, from the main computer to the encoder, is thereby achieved, with the system being diagnosable and immune to noise. The outstanding characteristics of the uniformly digital design from HEIDENHAIN guarantee very high accuracy and surface finish quality, combined with high traversing speeds.

Connection of the components:

- Control components via **HSCI** (HEIDENHAIN Serial Controller Interface), the HEIDENHAIN real-time protocol for Gigabit Ethernet
- Encoders via the **EnDat 2.2** bi-directional interface from HEIDENHAIN
- Power modules via digital optical fiber cables

HSCI

HSCI, the HEIDENHAIN Serial Controller Interface, connects the main computer, controller(s), and other control components. The connection between two HSCI components is also referred to as an HSCI segment. HSCI communication in Gen 3 control systems is based on Gigabit Ethernet hardware. All HSCI components and HSCI cables must therefore be Gigabit-capable. A special interface component developed by HEIDENHAIN enables short cycle times for data transfer.

Main advantages of the control design with HSCI:

- Hardware platform for a flexible and scalable control system (e.g., decentralized axis systems)
- High noise immunity due to digital communication between components
- Hardware basis for implementing "functional safety"
- Simple wiring (commissioning, configuration)
- Inverter connection via digital optical fiber cables
- Long line lengths in the overall system
- High number of possible control loops
- High number of PLC inputs/outputs
- Decentralized arrangement of the controller units

CC or UEC controller units, up to nine PL 6000 PLC I/O modules, and machine operating panels (e.g., MB 72x from HEIDENHAIN) can be connected to the serial HSCI bus of the MC main computer. The HR handwheel is connected directly to the machine operating panel. The combination of monitor and main computer is especially advantageous if the computer is housed in the operating panel. Besides the power supply, all that is then required is an HSCI line to the controller unit in the electrical cabinet.

Maximum cable lengths for HSCI:

- For one HSCI segment: 70 m
- For up to 12 HSCI slaves: 290 m (total of HSCI segments)
- For up to 13 HSCI slaves (maximum configuration): 180 m (total of HSCI segments)

Control systems with integrated functional safety (FS)

The maximum permissible number of individual HSCI participants is listed below:

Gbit HSCI component		Maximum number in the control system
MC, IPC	HSCI master	1
CC, UEC	HSCI slave	5 ¹⁾
UVR	HSCI slave	4
MB, PLB 600x	HSCI slave	2
PLB 6xxx (integrated in UEC 3xx (FS))	HSCI slave	7
PLB 6xxx FS (integrated in UEC 3xx FS)	HSCI slave	2
HR		5
PLD-H xx-xx-xx FS	In PLB 6xxx FS	10 ²⁾
PLD-H xx-xx-xx, PLA-H xx-xx-xx	In PLB 6xxx (FS)	25 ²⁾
PAE-H xx-xx-xx	In PLB 62xx	1 ³⁾
UEC 3xx for external safety	HSCI slave (PAE module integrated)	1 ³⁾

- ¹⁾ Controller motherboards distributed to CC or UEC as desired.
Increased to five units as of NCK software 597110-15
(for more information on the NCK software, see the *Technical Manual* of the respective control).
- ²⁾ Maximum total of 1000 inputs/outputs
- ³⁾ Only in systems without integrated functional safety (FS)

Basic principle

With controls with integrated functional safety (FS) from HEIDENHAIN, Safety Integrity Level 2 (SIL 2) as per the standard EN 61508 and Performance Level "d" Category 3 as per EN ISO 13849-1 can be attained. In these standards, the assessment of safety-related systems is based on, among other things, the failure probabilities of integrated components and subsystems. This modular approach aids the manufacturers of safety-related machines in implementing their systems, since they can then build upon prequalified subsystems. This design is taken into account for the MANUALplus 620 control, as well as for safety-related position encoders. Two redundant, mutually independent safety channels form the basis of the controls with functional safety (FS). All safety-relevant signals are captured, processed, and output via two channels. Errors are detected through a reciprocal data comparison of the two channels' states. Consequently, the occurrence of a single error in the control does not cause a loss in safety functionality.

Design

The safety-related controls from HEIDENHAIN have a dual-channel design with mutual monitoring. The SPLC (safety-related PLC program) and SKERN (safety kernel software) software processes are the basis of the two redundant systems. The two software processes run on the MC main computer (CPU) and CC controller unit components. The dual-channel configuration through MC and CC is continued in the I/O systems PLB 6xxx FS and MB 720T FS. This means that all safety-relevant signals (e.g., permissive buttons and keys, door contacts, emergency stop button) are captured via two channels, and are evaluated independently of each other by the MC and CC. The MC and CC use separate channels to also address the power modules, and to stop the motors in the event of an error.

Components

In systems with functional safety, certain hardware components assume safety-relevant tasks. In systems with FS, only safety-relevant components are permitted to be used that, including their variant from HEIDENHAIN, are approved for this.

Control components with functional safety FS can be recognized based on the addition of "FS" after the type designation, e.g., MB 720T FS.

For a current list of the components approved for functional safety (FS), refer to *Functional safety (FS) supplement to the Technical Manual* (ID 1177599).

An MB machine operating panel with functional safety (FS) is indispensable for systems with FS. Only on such a machine operating panel do all keys have a dual-channel design. Axes can be moved without additional permissive keys.

PLB

In systems with functional safety (FS), a combination of hardware (FS and standard) is possible, but a PLB 62xx FS is mandatory.

HR

In systems with functional safety (FS), FS handwheels are required because they are the only ones equipped with the required cross-circuit-proof permissive buttons.

Control systems with external safety

- Safety functions**
- Safety functions integrated into hardware and software:
- Safe stop reactions (SS0, SS1, and SS2)
 - Safe torque off (STO)
 - Safe operating stop (SOS)
 - Safely limited speed (SLS)
 - Safely limited position (SLP)
 - Safe brake control (SBC)
 - Safe operating modes
 - Operating mode 1: Automated or production mode
 - Operating mode 2: Set-up mode
 - Operating mode 3: Manual intervention
 - Operating mode 4: Advanced manual intervention, process monitoring

Please note: Full functionality is not yet available for all machine types with functional safety (FS). Before planning a machine with functional safety (FS), please determine whether the current scope of features is sufficient for your machine design.

- Activation of functional safety (FS)**
- The following requirements are absolutely necessary:
- At least one PLB 62xx FS must be present in the system
 - Safety-relevant control components in FS design (e.g., MB 720T FS, HR 550 FS)
 - Safety-related SPLC program
 - Configuration of safe machine parameters
 - Wiring of the machine for systems with functional safety (FS)

Functional safety (FS) can be scaled via the software options 160-166 and 169 (see Page 14). Only the number of safe drive systems actually needed must be enabled.

For every active drive that is assigned to a safe axis group, a safe control loop must be enabled. The control will otherwise display an error message.

- For more information**
- For details, see the *Functional Safety FS* Technical Manual. Your contact person at HEIDENHAIN will be glad to answer any questions concerning controls with functional safety (FS).

- Basic principle**
- In control systems without integrated functional safety (FS), no integrated safety functions, such as safe operating modes, safe speed monitoring, or safe operating stop, are available. Such functions must be implemented entirely with the help of external safety components.

Control systems without integrated functional safety (FS) solely support the realization of the safety functions STO (safe torque off: dual-channel interruption of the motor power supply) and SBC (safe brake control: dual-channel triggering of the motor holding brakes). The dual-channel redundancy of the functions must be realized by the OEM through appropriate wiring.

- Design**
- In control systems with external safety, a special PL module for the dual-channel triggering of STO and SBC is absolutely necessary. This module is the PAE-H 08-00-01, with which up to eight axis groups can be individually controlled.

Operating system

HEROS 5

The MANUALplus 620 works with the real-time capable HEROS 5 operating system (HEIDENHAIN Realtime Operating System). This future-oriented operating system contains the following powerful functions as part of its standard repertoire:

Network

- Network: management of network settings
- Printer: management of printers
- Shares: management of network shares
- VNC: virtual network computing server

Safety

- Portscan (OEM): port scanner
- Firewall: protection against undesired network access
- SELinux: protection against unauthorized changes to system files
- Sandbox: running applications in separated environments

System

- Backup/Restore: function for backing-up and restoring the software on the control
- HELogging: evaluation and creation of log files
- Perf2: system monitor
- User administration: define users with different roles and access permissions

Tools

- Web browser: Firefox®*)
- Document Viewer: display PDF, TXT, XLS, and JPEG files
- File Manager: file explorer for managing files and memory media
- Gnumeric: spreadsheet calculations
- Leafpad: text editor for creating notes
- Ristretto: display of image files
- Orage Calendar: simple calendar function
- Screenshot: creation of screendumps
- Totem: media player for playing audio and video files

User administration

The improper operation of a control often leads to unplanned machine downtime and costly scrap. The user administration feature can significantly improve process reliability through the systematic avoidance of improper operation. Through the configurable linkage of rights with user roles, access can be tailored to the activities of the respective user.

- Logging on to the control with a user account
- User-specific HOME folder for simplified data management
- Role-based access to the control and network data



Axes

Overview

The MANUALplus 620 is a contouring control for lathes with one spindle and a slide (X, Z, and Y) for tool movement. For rear-face machining of the workpiece, an optional counter spindle can be operated in addition to the main spindle.

The control can offset the display of movements in the Z axis with those of its secondary axis W. Additional axes are available for positioning steady rests and the tailstock.

The MANUALplus 620 is suitable for various machine configurations, and supports **horizontal** as well as **vertical** lathes. Some examples of machine configurations:



Display and programming

Feed rate in

- mm/min
- mm/revolution
- Feed rate override: 0 % to 150 %
- Maximum feed rate at $f_{PVM} = 5000 \text{ Hz}$:

$$\frac{60000 \text{ rpm}}{\text{No. of motor pole pairs}} \cdot \text{Screw pitch [mm]}$$

Traverse range

-99999.9999 to +99999.9999 [mm]

The machine manufacturer defines the traverse range. The user can set additional limits to the traverse range if he wishes to reduce the working space (software limit switch). A protection zone for the spindle (Z-) can also be specified.

Tool carriers

The MANUALplus 620 supports quick change tool posts (multifix), tool turrets, and tool magazines. The tool carriers can be located in front of or behind the workpiece.


*) Firefox is a registered trademark of the Mozilla Foundation

Synchronized axes

Synchronized axes move in synchronism and are programmed with the same axis designation.

With HEIDENHAIN controls, parallel axis systems (gantry axes), such as on portal-type machines or tilting tables, can be moved synchronously to each other through high-accuracy and dynamic position control.

In the case of **gantry axes**, multiple gantry slave axes can be assigned to a single master axis. They may also be distributed to multiple controller units.

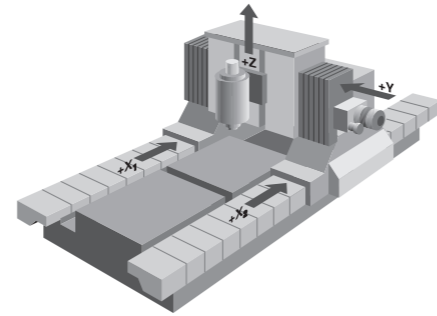

B Axis (software option 54)

With a B axis it is possible to drill, bore, and mill in oblique planes. Programming, as usual, can be done in the main plane.


Moreover, by tilting the B axis and rotating the tool you can bring it into positions that enable you, for example, to use a single tool to machine in the longitudinal and transverse directions on the main and counter spindles. The number of required tools and tool changes can thus be reduced.

Torque Control (software option 24)

Torque control is used on machines with mechanically coupled motors, for which

- a defined distribution of drive torque is desired, or
- parts of the controlled system show a backlash effect that can be eliminated by "tensioning" the motors (e.g. toothed racks).

For torque control, the master and slave must be on the same controller motherboard. Depending on the controller unit being used, up to five slave axes can thereby be configured for each master.

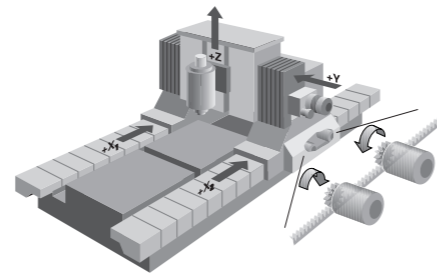


Real-time coupling function (software option 135)

The real-time coupling function (Synchronizing Functions) allows the cyclic calculation of a position offset for an axis from the actual and nominal values of any other axes in the system. This enables you to realize complex simultaneous movements of several NC or PLC axes. The mutual dependence of the axes is defined in mathematical formulas.

PLC axes

Axes can be defined as PLC axes. Programming is performed through M functions or OEM cycles. The PLC axes are positioned independently of the NC axes and are therefore designated as asynchronous axes.

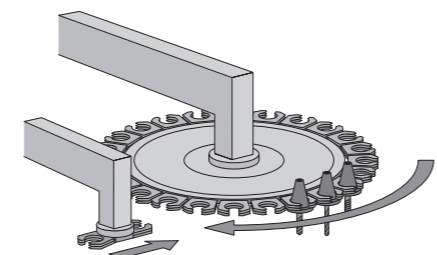

Spindle and counter spindle

Overview

The MANUALplus 620 contouring control operates in conjunction with the HEIDENHAIN inverter systems with field-oriented control. As an alternative, an analog nominal speed value can be output.

For machines featuring a higher level of automation, you can position the spindle or counter spindle, or switch to C-axis operation.

Controller unit

With the CC controller units and the UEC/UMC inverters, a fundamental PWM frequency can be set for each output. In this case, every output can have its own fundamental PWM frequency (e.g., with the CC 306: X551 = 4 kHz, X552 = 5 kHz, etc.).

Possible fundamental frequencies are 3.33 kHz, 4 kHz, or 5 kHz.

With software option 49 (Double Speed Axes), this frequency can be increased to up to 16 kHz for fast-turning spindles (e.g., HF spindles).

Display and programming

Spindle speed:

- Constant shaft speed: 1 to 99999 rpm
- Constant surface speed: 1 to 9999 m/min

Spindle positioning

Input resolution and display step: 0.001°

Speed limiting

- The MANUALplus 620 monitors the actual speed.
- Speed limiting can be adjusted via parameter and in the tool/spindle/feed-rate menu (TSF menu).

Spindle override

50 % to 150 %

Maximum spindle speed

The maximum spindle speed is calculated as follows:

$$n_{\max} = \frac{f_{\text{PWM}} \cdot 60000 \text{ rpm}}{\text{NPP} \cdot 5000 \text{ Hz}}$$

f_{PWM} = PWM frequency in Hz
 NPP = Number of pole pairs

Gear ranges

A specific parameter set can be defined for each gear range. The gears are switched via the PLC. Up to 10 gear ranges are supported.

Operating mode switchover

For controlling the spindle, different parameter sets can be saved for closed-loop control (e.g., for wye or delta connections). You can switch between the parameter sets in the PLC.

Position-controlled spindle

The position of the spindle is monitored by the control.

Encoder

HEIDENHAIN rotary encoder with sinusoidal voltage signals (1 V_{pp}) or EnDat interface.

C-Axis Machining (software option 55)

For milling, drilling, and boring cycles, either the spindle or counter spindle is switched to C-axis operation, or a separate C-axis drive is activated.

Input resolution and display step: 0.001°

Counter Spindle (software option 132)


The **Counter Spindle** option is necessary in order to work with a counter spindle. The Spindle Synchronism option is included in the Counter Spindle option.

Driven tools

- Overview** The driven tool is used for drilling and tapping holes as well as for milling in M19 or C-axis operation. Programs for the driven tool can be input in manual operation, via cycles with smart.Turn, or in the DIN editor.
- Display and programming** Speed of the driven tool:
- Constant shaft speed: 1 to 99999 rpm
 - Constant surface speed: 1 to 9999 m/min
- Speed limiting**
- The MANUALplus 620 monitors the actual speed.
 - Speed limiting can be adjusted via parameter and in the tool/spindle/feed-rate menu (TSF menu).
- Spindle Synchronism (software option 131)** The **Spindle Synchronism** option is necessary for special operations with a driven tool (e.g. polygonal turning.) This option is included in the Counter Spindle option.

Encoders

- Overview** For speed and position control of the axes and spindle, HEIDENHAIN offers both incremental and absolute encoders.
- Incremental encoders** Incremental encoders have as their measuring standard a grating consisting of alternating lines and spaces. Relative movement between the scanning head and the scale causes the output of sinusoidal scanning signals. The measured value is calculated by counting the signals.
- Reference mark** After the machine has been switched on, the relationship between the measured value and the machine position must be established by traversing the reference marks. For encoders with distance-coded reference marks, the maximum travel until automatic reference mark storage for linear encoders is only 20 mm or 80 mm, depending on the model, or 10° or 20° for angle encoders.
- Evaluation of reference marks** The routine for traversing the reference marks can also be started for specific axes via the PLC during operation (reactivation of parked axes).
- Output signals** Incremental encoders with sinusoidal output signals with $\sim 1 V_{PP}$ levels are suitable for connection to HEIDENHAIN numerical controls.
- Absolute encoders** With absolute encoders, the position information is contained in several coded tracks. Thus, an absolute reference is available immediately after switch-on. A reference-mark traverse is not necessary. Additional incremental signals are output for highly dynamic control loops.
- EnDat interface** The MANUALplus 620 features the serial EnDat 2.2 interface (includes EnDat 2.1) for the connection of absolute encoders.
- Note:** The EnDat interface on HEIDENHAIN encoders differs in its pin assignment from the interface on Siemens motors with integrated absolute ECN/EQN rotary encoders. Special adapter cables are available.
- Encoder inputs** Incremental and absolute linear, angle, or rotary encoders from HEIDENHAIN can be connected to all **position encoder** inputs of the controller unit.
- Incremental and absolute rotary encoders from HEIDENHAIN can be connected to all **speed encoder** inputs of the controller unit.

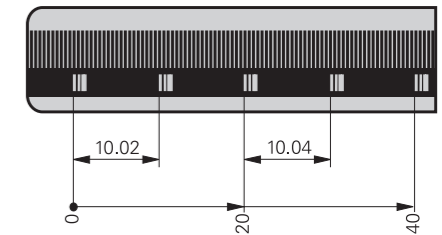

Inputs	Signal level/ Interface ¹⁾	Input frequency ¹⁾	
		Position	Speed
Incremental signals	$\sim 1 V_{PP}$ EnDat 2.1	33 kHz/350 kHz	350 kHz
Absolute position values	EnDat 2.1 EnDat 2.2	–	–

¹⁾ Switchable

Digital servo control

Integrated inverter Position controllers, speed controllers, current controllers, and inverters are integrated into the MANUALplus 620. HEIDENHAIN synchronous or asynchronous motors are connected to the MANUALplus 620.

Axis feedback control The MANUALplus 620 can control axes with servo lag or feedforward control. During roughing operations at high speeds, for example, you can switch to velocity semi-feedforward control via an OEM cycle in order to machine faster at reduced accuracy.

Operation with servo lag The term "servo lag" denotes the distance between the momentary nominal position and the actual position of the axis. The velocity is calculated as follows:

$$v = k_v \cdot s_a$$

v = Velocity
 k_v = Position loop gain
 s_a = Servo lag

Operation with feedforward control Feedforward means that a given velocity and acceleration are adapted to the machine. Together with the values calculated from the servo lag, this given velocity and acceleration becomes the nominal value. A much lower servo lag thereby manifests itself (in the range of only a few microns).

Compensation of torque ripples The torque of synchronous, torque, and linear motors is subject to periodic oscillations, one cause of which can be permanent magnets. The amplitude of this torque ripple depends on the motor design and, under certain circumstances, can have an effect on the workpiece surface. During initial configuration of the axes with TNCopt, this "torque ripple" can be compensated for by means of the Torque Ripple Compensation (TRC) function of the CC or UEC.

Control loop cycle times The cycle time for **path interpolation** is defined as the time interval during which interpolation points on the path are calculated. The cycle time for **fine interpolation** is defined as the time interval during which interpolation points are calculated that lie within the interpolation points calculated for path interpolation. The cycle time for the **position controller** is defined as the time interval during which the actual position value is compared to the calculated nominal position value. The cycle time for the **speed controller** is defined as the time interval in which the actual speed value is compared to the calculated nominal speed value. The cycle time for the **current controller** is defined as the time interval during which the actual value of the electrical current is compared to the calculated nominal value of the electrical current.


	CC/UEC/UMC
Path interpolation	3 ms
Fine interpolation	0.2 ms/0.1 ms ¹⁾ at $f_{PWM} = 5000$ Hz
Position controller	0.2 ms/0.1 ms ¹⁾ at $f_{PWM} = 5000$ Hz
Speed controller	0.2 ms/0.1 ms ¹⁾ at $f_{PWM} = 5000$ Hz
Current controller	0.1 ms at $f_{PWM} = 5000$ Hz

¹⁾ Double speed (with software option 49)

Axis clamping The control loop can be opened through the PLC in order to clamp specific axes.


Double speed control loops (software option 49) Double-speed control loops permit higher PWM frequencies and shorter cycle times for the speed controller. This enables improved current control for spindles and higher controller performance for linear and torque motors.

Crossover Position Filter (CPF) To increase the stability of the position control loop in systems with resonances, the position signal from the position encoder, which is filtered through a low-pass filter, is combined with the position signal from the motor speed encoder, which is filtered through a high-pass filter. This signal combination is made available to the position controller as the actual position value. The possible position controller gain (k_v factor) is increased significantly by this. The filter separation frequency is set specifically for each axis via machine parameters. The CPF can be used only in dual-encoder systems; i.e., on motors with a speed encoder and position encoder.

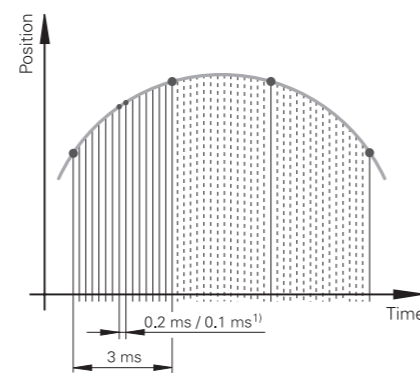

Fast machining


Look-ahead The MANUALplus 620 calculates the geometry ahead of time in order to adjust the feed rate. In this way, directional changes are detected in time to accelerate or decelerate the appropriate NC axes.

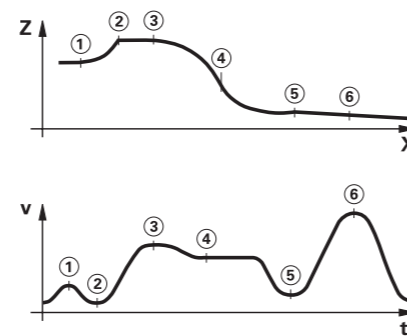

Jerk The derivative of acceleration is referred to as jerk. A linear change in acceleration causes a jerk step. Such motion sequences may cause the machine to oscillate.

Jerk limiting To prevent machine oscillations, the jerk is limited in order to attain optimum path control.

Smoothed jerk The jerk is smoothed by nominal position value filters. The MANUALplus 620 therefore mills smooth surfaces at the highest possible feed rate and yet keeps the contour accurate. The permitted tolerance is programmed by the user via a cycle. Special filters for HSC machining (HSC filters) can suppress machine-specific natural frequencies. The desired accuracy along with very high surface quality are attained.

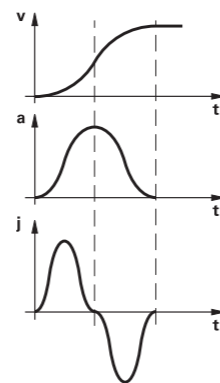

Advanced Dynamic Prediction (ADP) The Advanced Dynamic Prediction (ADP) function enhances the conventional look-ahead of the permissible maximum feed rate profile, thereby enabling optimized motion control for clean surface finishes and perfect contours. The strengths of ADP are evident, for example, during bidirectional finish milling through symmetrical feed behavior on the forward and reverse paths, as well as through particularly smooth feed rate curves on parallel milling paths. NC programs that are generated on CAM systems have a negative effect on the machining process due to various factors such as short, step-like contours; coarse chord tolerances; and heavily rounded end-point coordinates. Through an improved response to such factors and the exact adherence to dynamic machine parameters, ADP not only improves the surface quality of the workpiece but also optimizes the machining time.

Monitoring functions

Description During operation, the control monitors the following details*):

- Amplitude of the encoder signals
- Edge separation of the encoder signals
- Absolute position from encoders with distance-coded reference marks
- Current position (following error monitoring)
- Actual distance traversed (movement monitoring)
- Position deviation at standstill
- Nominal speed value
- Checksum of safety-related functions
- Supply voltage
- Voltage of the backup battery
- Operating temperature of the MC and CPU
- Run time of the PLC program
- Motor current / motor temperature
- Temperature of the power module
- DC-link voltage

With EnDat 2.2 encoders:

- The CRC checksum of the position value
- EnDat alarm Error1 → EnDat status alarm register (0xEE)
- EnDat alarm Error2
- Edge speed of 5 μs
- Transmission of the absolute position value on the time grid

In the event of hazardous errors, an emergency stop message is sent to the external electronics via the control-is-ready output, and the axes are brought to a stop. The correct connection of the MANUALplus 620 in the machine's emergency stop loop is checked when the control system is switched on. In the event of an error, the control displays a message in plain language.

*) No safety functions

Context-sensitive help A context-sensitive help function is available to the user via the Info or ERR softkey. In the event of an error message, the control displays the cause of the error and the possibilities for fixing it. The machine manufacturer can also implement this user support for PLC error messages.

Load Monitoring (software option 151) This option monitors the load that occurs during machining processes in order to detect the wear or breakage of tools. By performing a reference operation for each machining step, the nominal load on the motors is determined. The actual motor load is then continuously compared to the nominal load. Up to four motors can be monitored per machining step. In the event of tool wear or breakage, two definable limit values trigger error reactions.

Tool wear If the load and/or load integral exceed the limit values for tool wear, the MANUALplus 620 designates the current tool as worn. With active tool life monitoring, the tool will automatically be replaced by a defined replacement tool the next time it is called.

Tool breakage If the load exceeds the limit value for tool breakage, the MANUALplus 620 immediately stops machining (cycle stop).

Meaningful error messages are issued if the limit values are exceeded. Furthermore, the MANUALplus 620 can display the load values numerically and graphically in a separate window.


Component Monitoring (software option 155) The overloading of machine components is often the cause of expensive machine damage and unplanned production downtime. Component monitoring keeps the user informed about the current load on the spindle bearings and reacts upon exceedance of the specified limit values (e.g., with an NC stop).

Error compensation

Overview The MANUALplus 620 automatically compensates for mechanical errors of the machine.

Linear error Linear error can be compensated over the entire travel range for each axis.

Nonlinear error The MANUALplus 620 can compensate for ball-screw pitch errors and sag errors simultaneously. The compensation values are stored in a table. Nonlinear axis-error compensation also makes it possible to compensate for position-dependent backlash.

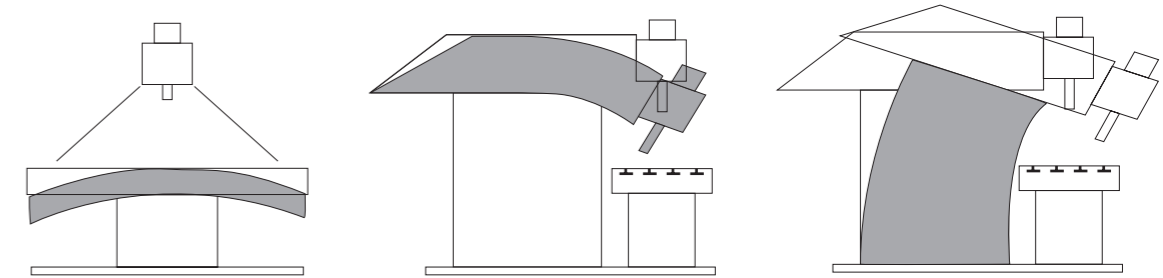

Backlash The play between table movement and rotary encoder movement during direction changes can be compensated for in length measurements by the spindle and rotary encoder. This backlash is outside the controlled system.

Hysteresis The hysteresis between the table movement and motor movement is also compensated for in direct length measurements. In this case, the hysteresis is within the controlled system.

Reversal spikes In circular movements, reversal spikes can occur at quadrant transitions due to mechanical influences. The MANUALplus 620 can compensate for these reversal spikes.

Static friction At very low feed rates, high static friction can cause the slide to stop and start repeatedly for short periods. This is commonly known as stick-slip. The MANUALplus 620 can compensate for this problematic behavior.

Sliding friction Sliding friction is compensated for by the speed controller of the MANUALplus 620.

Thermal expansion To compensate for thermal expansion, the machine's expansion behavior must be known.

The temperature is measured via thermistors connected to the analog inputs of the MANUALplus 620. The PLC evaluates the temperature information and passes a compensation value to the NC.

Load Adaptive Control (LAC, software option 143) With LAC (software option 143), you can dynamically adjust controller parameters based on the load or friction.

In order to optimize changed control behavior at differing loads, adaptive feedforward controls can exploit data on acceleration, holding torque, static friction, and friction.

Initial setup and diagnostic aids

Overview The MANUALplus 620 provides comprehensive internal commissioning and diagnostic aids. It also includes highly effective PC software for diagnostics, optimization, and remote control.


ConfigDesign (accessory) PC software for configuring the machine parameters

- Stand-alone machine-parameter editor for the control; all supporting information, additional data, and input limits are shown for the parameters
- Configuration of machine parameters
- Comparison of parameters from different controls
- Importing of service files: easy testing of machine parameters in the field
- Rule-based creation and management of machine configurations for multiple controls (together with PLCdesign)

TNCdiag The HEIDENHAIN TNCdiag application evaluates the status and diagnostic information of HEIDENHAIN components (with an emphasis on the drive systems) and graphically images the data:

- Status and diagnostic information about the HEIDENHAIN components (drive electronics, encoders, input/output devices, etc.) connected to the control
- History of the recorded data
- Replaces DriveDiag for Gen 3 drives

TNCdiag comes in a PC version for the analysis of service files and in a control version for the display of live data.

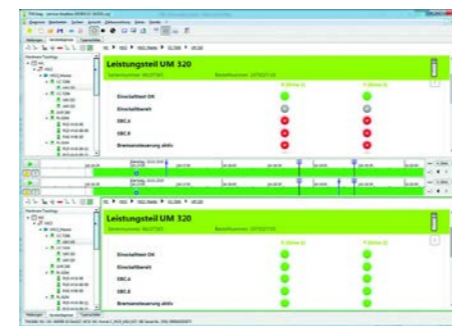


Oscilloscope The MANUALplus 620 features an integrated oscilloscope. Both X/t and X/Y graphs are possible. The following characteristic curves can be recorded and stored in six channels:

- Actual value and nominal value of the axis feed rate
- Contouring feed rate
- Nominal and actual position
- Following error of the position controller
- Content of PLC operands
- Encoder signal (0°-A) and (90°-B)
- Difference between position and speed encoder
- Nominal velocity value
- Integral-action component of the nominal current value
- Torque-determining nominal current value


Logic signals Simultaneous graphical representation of the logic states of up to 16 operands (markers, words, inputs, outputs, counters, timers)

- Marker (M)
- Input (I)
- Output (O)
- Timer (T)
- Counter (C)
- lpoLogic (X)

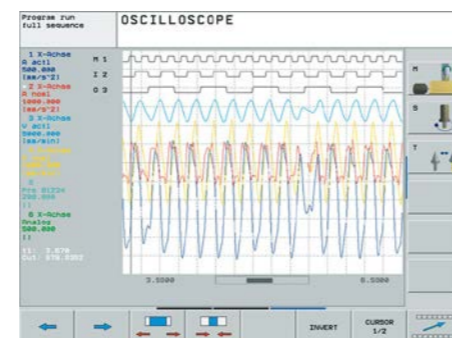

TNCopt (accessory) PC software for commissioning digital control loops. Functions (among others):

- Initial setup of the current controller
- (Automatic) initial setup of the velocity controller
- (Automatic) optimization of sliding-friction compensation
- (Automatic) optimization of compensation for reversal spikes
- (Automatic) optimization of the k_v factor
- Circular interpolation test, contour test

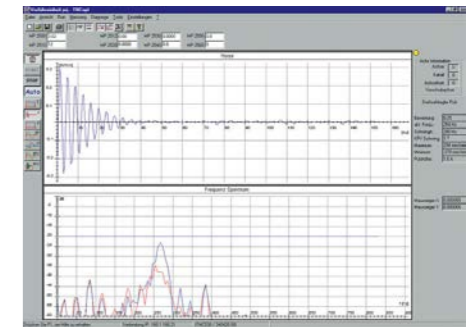

Online Monitor (OLM) The online monitor is a component of the MANUALplus 620 and is called with a code number. It supports commissioning and diagnosis of control components through the following:

- Display of control-internal variables for axes and channels
- Display of controller-internal variables (if a CC is present)
- Display of hardware signal states
- Various trace functions
- Activation of spindle commands
- Enabling of control-internal debug outputs

TNCscope (accessory) PC software for transferring the oscilloscope files to a PC. With TNCscope you can record and save up to 16 channels simultaneously.

API DATA With the API DATA function, the control displays the states or contents of the symbolic API markers and API double words.

Table function The current conditions of the markers, words, inputs, outputs, counters, and timers are displayed in tables. The conditions can be changed through the keyboard.

Trace function The current content of the operands and the accumulators is shown in the statement list in each line in hexadecimal or decimal code. The active lines of the statement list are marked.

Log For the purpose of error diagnostics, all error messages and keystrokes are recorded in a log. The entries can be read using the **PLCdesign** or **TNCremo** software for PCs.

TeleService (accessory) PC software for remote diagnostics, remote monitoring, and remote operation of the control. For more information, please ask for the *Remote Diagnosis with TeleService* Technical Information sheet.

Single station license ID 340449-xx

Bus diagnosis In Diagnosis mode, the structure of the connected bus systems as well as the details of the connected components can be shown in an intuitive manner.

State Reporting (software option 137) With the State Reporting Interface (SRI) software option, HEIDENHAIN offers an interface for the simple provision of machine operating states for a higher-level machine data or production data acquisition system (MDA/PDA).

TNCtest

Acceptance tests on machine tools with external or integrated functional safety (FS) must be conducted reproducibly and verifiably.

The TNCtest and TestDesign program package can be used to plan and perform acceptance tests for machine tools with HEIDENHAIN controls. The acceptance tests are planned with TestDesign and run with TNCtest.

The TNCtest programs are designed to provide support during acceptance testing, provide required information, and perform automatic configurations, as well as record data and evaluate the data semiautomatically. A tester must evaluate manually whether a test case passed or failed.

TNCAnalyzer

The TNCAnalyzer application from HEIDENHAIN provides for simple and intuitive evaluation of service files and log files.

Function:

- Loading of service and log files
- Analysis of temporal sequences and static states
- Filters and search functions
- Data export (HELogger, CSV, and JSON formats)
- Definition of application-specific analysis profiles
- Preconfigured analysis profiles
- Graphical display of signals via TNCscope
- Interaction with other tools that are intended for the display of special sections of the service file

Integrated PLC

Overview

The PLC program is created by the machine manufacturer either at the control or with the PLC development software **PLCdesign** (accessory). Machine-specific functions are activated and monitored via the PLC inputs/outputs. The number of PLC inputs/outputs required depends on the complexity of the machine.

PLC inputs/outputs

PLC I/Os are available via the external PL 6000 or UxC 3xx. The PLC I/Os and the PROFINET IO or PROFIBUS DP-capable I/O system must be configured with the IOconfig PC software.

PLC programming

Format	Statement list
Memory	4 GB
Cycle time	9 ms to 30 ms (adjustable)
Command set	<ul style="list-style-type: none">• Bit, byte, and word commands• Logical operations• Arithmetic commands• Comparisons• Bracketed terms• Jump commands• Subprograms• Stack operations• Submit programs• Timers• Counters• Comments• PLC modules• Strings

Encryption of PLC data

The encrypted PLC partition (PLCE:) provides the machine manufacturer with a tool for preventing third parties from viewing or changing files. The files on the PLCE partition can be read only by the control itself or by using the correct OEM keyword. This ensures that proprietary know-how and special customer-specific solutions cannot be copied or changed.

The machine manufacturer can also determine the size of the encrypted partition. This is not determined until the machine manufacturer creates the PLCE partition. Another advantage is that, in spite of the encryption, the data can be backed up from the control to a separate data medium (USB drive, network, e.g., through TNCremo) and later restored. You need not enter the password, but the data cannot be read until the keyword is supplied.

PLC window The MANUALplus 620 can display PLC error messages in the dialog line during operation.

PLC soft keys The machine manufacturer can display his own PLC soft keys in the vertical soft-key row on the screen.

PLC positioning All closed-loop axes can also be positioned via the PLC. PLC positioning of the NC axes cannot be superimposed on NC positioning.

PLC axes Axes can be defined as PLC axes. They are programmed by means of M functions or OEM cycles. The PLC axes are positioned independently of the NC axes.

PLCdesign (accessory) PC software for PLC program development. The PC program **PLCdesign** can be used for easy creation of PLC programs. Extensive examples of PLC programs are included.

Functions:

- Easy-to-use text editor
- Menu-guided operation
- Programming of symbolic operands
- Modular programming techniques
- "Compiling" and "linking" of PLC source files
- Operand commenting, creation of the documentation file
- Comprehensive help system
- Data transfer between the PC and control
- Creation of PLC soft keys


Python OEM Process (software option 46)

The Python OEM Process software option gives the machine manufacturer a powerful tool for using a high-level, object-oriented programming language in the control (PLC). Python is an easy-to-learn script language supporting all necessary high-level language elements.

Python OEM Process can be used universally for machine functions and complex calculations, as well as to display special user interfaces. User-specific or machine-specific solutions can be efficiently implemented. Numerous libraries on the basis of Python and GTK are available, regardless of whether you want to create special algorithms for special functions, or separate solutions such as an interface for machine maintenance software.

The applications you create can be included via the PLC in the familiar PLC windows, or they can be displayed in separate free windows that can be expanded to the control's full screen size.

Simple Python scripts (e.g., for display masks) can also be executed without enabling the Python OEM Process software option (software option 46). Reserved for this function are 10 MB of dedicated memory. For more information, refer to the *Python in HEIDENHAIN Controls* Technical Manual.

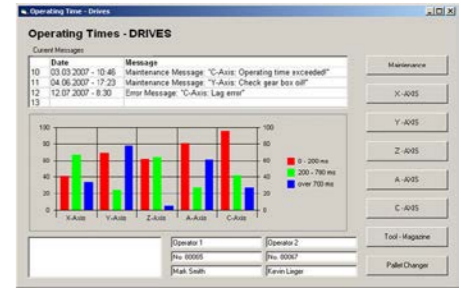

PLC basic program The PLC basic program serves as the basis for the adaptation of the control to the requirements of the respective machine model. It can be downloaded from the Internet. These essential functions are covered by the PLC basic program:

- General information
 - Vertical PLC soft-key row
 - Display and management of PLC error messages
 - Hydraulic control
 - Work envelope protection
 - Chuck protection
 - Chuck (inner and outer chucking for compression and tension fixtures)
 - Control of the coolant system (internal, external, air)
 - Handling of M functions
 - Chip conveyor
 - PLC support for handwheels
 - PLC log
 - Diagnostic screen (Python)
 - Python example applications
 - Status display is modifiable by the user in the dashboard area (Python widget)
 - Tailstock (coupled Z axis) with quill
- System
 - Milling/turning with B axis
- Axes
 - Control of analog and digital axes
 - Axes with clamping mode, central drive, and Hirth grid
 - Synchronized axes
 - Reference run, reference end position
 - Feed rate control
 - Axis lubrication
 - Temperature compensation
- Spindles
 - Control of analog and digital spindles (S1 to S5)
 - Spindle synchronism for main and counter spindles (S1/S4)
 - Torque reduction for workpiece transfer (S1/S4)
 - Oriented spindle stop
 - Spindles with clamping mode
 - Gear switching via M functions
 - C-axis operation of spindles (S1/S4)
 - C-axis operation via separate motor
- Tool changers
 - Manual tool changer
 - Tool change with multifix
 - Positioning of the tool turret with three-phase AC motor
 - Tool changer with revolver system (five types)
 - Tool changer with B axis, tool gripper, tool shuttle, and *n* tool magazines
 - Service functions for the tool changer
- Safety functions
 - Functional safety (FS)
 - Emergency stop test (EN 13849-1)
 - Brake test (EN 13849-1)
 - Repeated switch-on test

Interfacing to the machine

OEM cycles The machine manufacturer has the possibility of creating his own UNITS for programming in smart.Turn (menus, texts, dialogs, and evaluations). These UNITS can be called by a menu item in the UNIT menu.

With the MANUALplus 620 you can create your own manufacturer cycles (OEM G functions). The range G500 to G590 is intended for these G functions. They can be called via the G-function menu and integrated directly into the NC program.

In addition to the OEM G functions, PLC G functions (G602 to G699) can also be defined. The PLC G functions are processed directly in the PLC.

Tool management With integral PLC, the tool changer is moved either via proximity switch or as a controlled axis. Complete tool management with tool life monitoring and replacement tool monitoring is carried out by the MANUALplus 620.

Tool calibration With the TT tool touch probe systems (accessory), tools can be measured and inspected. Standard cycles for automatic tool measurement are available in the control. The control calculates the probing feed rate and the optimal spindle speed. The measured data are stored in a tool table.

Touch-probe configuration All touch-probe data can be configured conveniently through a table. All HEIDENHAIN touch probe systems are preconfigured and can be selected through a drop-down menu.

Magazine management The magazine management provides several functions for various magazine types:

- Loading and unloading of tools in chain-type magazines
- Loading and unloading between magazine and spindle
- Support for manual tools in manual magazines
- Support for block search in tool magazines

Data transfer and communication

Data interfaces

Overview	The MANUALplus 620 is connected to PCs, networks, and other data storage devices via data interfaces.
Ethernet	<p>The MANUALplus 620 can be interconnected via the Ethernet interface. For connection to a data network, the control features a 1000BASE-T (twisted pair Ethernet) connection.</p> <p>Maximum transmission distance: Unshielded: 100 m Shielded: 400 m</p>
Protocol	The MANUALplus 620 communicates using the TCP/IP protocol.
Network connection	<ul style="list-style-type: none">• NFS file server• Windows networks (SMB)
Data transmission speed	Approx. 400 to 800 Mbit/s (depending on the file type and network utilization)
Protocols	The MANUALplus 620 can transfer data using various protocols.
Standard data transmission	The data is transferred character by character. The number of data bits, stop bits, the handshake, and character parity must be set by the user.
Blockwise data transfer	The data is transferred blockwise. A block check character (BCC) is used for data backup. This method improves data security.
LSV2	Bidirectional transfer of commands and data as per DIN 66019. The data is divided into telegrams (blocks) and transmitted.
USB	The MANUALplus 620 features USB interfaces for connecting standard USB devices such as a mouse, disk drive, etc. The MC units have four USB 3.0 interfaces. The USB ports are rated for a maximum of 0.5 A.
USB cables	Cable length of up to 5 m ID 354770-xx Cable length of 6 m to 30 m with integrated amplifier; limited to USB 1.1 ID 624775-xx

Software for data transfer We recommend using HEIDENHAIN software to transfer files between the MANUALplus 620 and a PC.

TNCremo (accessory) This PC software package supports the user in transmitting data from the PC to the control. This software implements blockwise data transfer with block check characters (BCC).

Functions:

- Data transfer (including blockwise)
- Remote control (only serial)
- File management and data backup of the control
- Reading out the log
- Print-out of screen contents
- Text editor
- Managing more than one machine

TNCremoPlus (accessory) In addition to the features already familiar from TNCremo, TNCremoPlus can also transfer the current content of the control's screen to the PC (live screen). This makes it very simple to monitor the machine.

Additional functions:

- Interrogation of control information (NC uptime, machine uptime, machine running time, spindle running time, pending errors, data from the data servers—e.g., symbolic PLC operands)
- Overwriting of specific tool data based on values from a tool presetter

TNCremoPlus

ID 340447-xx

Connected Machining

Overview

Connected Machining makes uniformly digital job management possible in networked manufacturing. You also profit from:

- Easy data usage
- Time-saving procedures
- Transparent processes

Remote Desktop Manager (software option 133)

Remote control and display of external computers over an Ethernet connection (e.g., Windows PC). The information is displayed on the control's screen. Remote Desktop Manager allows you to access important applications, such as CAD/CAM applications or job management, from the control.

Remote Desktop Manager ID 894423-xx

HEIDENHAIN DNC (software option 18)

The development environments on Windows operating systems are particularly well suited as flexible platforms for application development in order to handle the increasingly complex requirements of the machine's environment.

The flexibility of the PC software and the large selection of ready-to-use software components and standard tools in the development environment enable you to develop PC applications of great use to your customers in a very short time, for example:

- Error reporting systems that, for example, send the customer a text message to his cell phone reporting problems on the currently running machining process
- Standard or customer-specific PC software that decidedly increases process reliability and equipment availability
- Software solutions controlling the processes of manufacturing systems
- Information exchange with job management software

The HEIDENHAIN DNC software interface is an attractive communication platform for this purpose. It provides all the data and configuration capabilities needed for these processes so that an external PC application can evaluate data from the control and, if required, influence the manufacturing process.


RemoTools SDK (accessory)

To enable you to use HEIDENHAIN DNC effectively, HEIDENHAIN offers the RemoTools SDK development package. It contains the COM component and the ActiveX control for integration of the DNC functions in development environments.

RemoTools SDK ID 340442-xx

For more information, refer to the *HEIDENHAIN DNC* brochure.

connected + machining

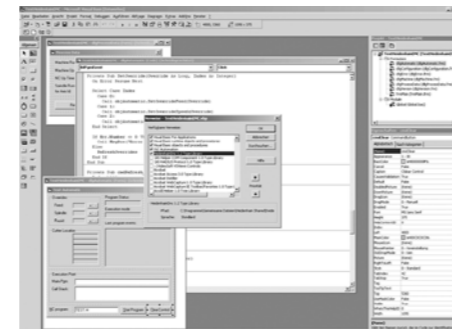


Mounting information

Clearances and mounting

Proper minimum clearance

When mounting the control components, please observe proper minimum clearances and space requirements, as well as length and position of the connecting cables.

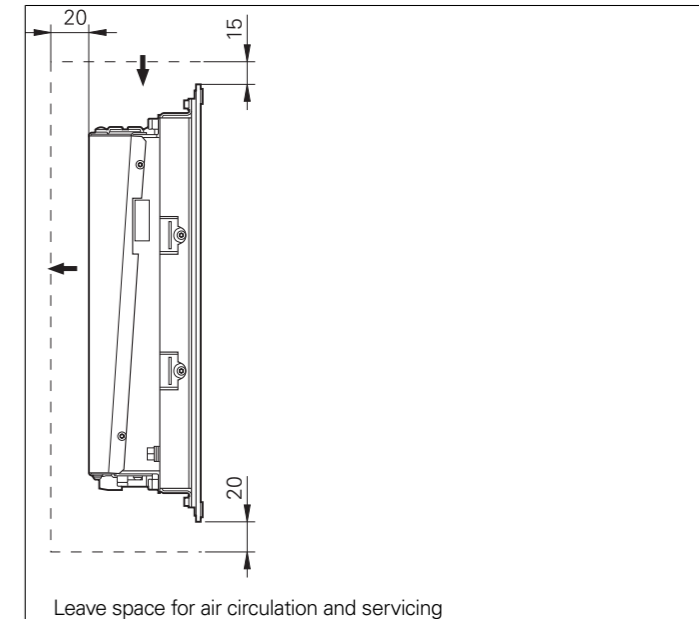

Mounting and electrical installation

Observe the following points during mounting and electrical connection:

- National regulations for low-voltage installations at the operating site of the machine or components
- National regulations regarding interference and noise immunity at the operating site of the machine or components
- National regulations regarding electrical safety and operating conditions at the operating site of the machine or components
- Specifications for the installation position
- Specifications of the Technical Manual

Degrees of protection

The following components fulfill the requirements for IP54 (dust protection and splash-proof protection):

- MANUALplus 620 (when properly installed)
- Machine operating panel (when properly installed)
- Handwheel

All electric and electronic control components must be installed in an environment (e.g., electrical cabinet, housing) with an IP54 rating (dust and splash-proof protection) in order to fulfill the requirements of pollution degree 2. All components of the OEM operating panel must also have an IP54 rating, just like the HEIDENHAIN operating panel components.

Electromagnetic compatibility

Protect your equipment from interference by observing the rules and recommendations specified in the Technical Manual.

Intended place of operation

This unit fulfills the requirements of EN 50370-1 and is intended for operation in industrially zoned areas.

Likely sources of interference

Interference is produced by capacitive and inductive coupling into electrical conductors or into device connections, caused by, e.g.:

- Strong magnetic fields from transformers or electric motors
- Relays, contactors, and solenoid valves
- High-frequency equipment, pulse equipment, and stray magnetic fields from switch-mode power supplies
- Power lines and leads to the above equipment

Protective measures

- Ensure that the MC, CC, and signal lines are at least 20 cm away from interfering devices
- Minimum distance of 10 cm between MC, CC, and signal lines to cables carrying interfering signals (in metal cable ducts, a grounded separation wall suffices for decoupling)
- Shielding according to EN 50178
- Use equipotential bonding lines in accordance with the grounding diagram (comply with the Technical Manual of your control).
- Use only genuine HEIDENHAIN cables and connecting elements

Installation elevation

The maximum elevation for installation of HEIDENHAIN control components (MC, CC, PLB, MB, TE, BF, IPC, etc.) is 3000 m above sea level.

Key dimensions


Main computer

MC 8420T

mm




Tolerancing ISO 8015
ISO 2768 - m H
< 6 mm: ± 0.2 mm

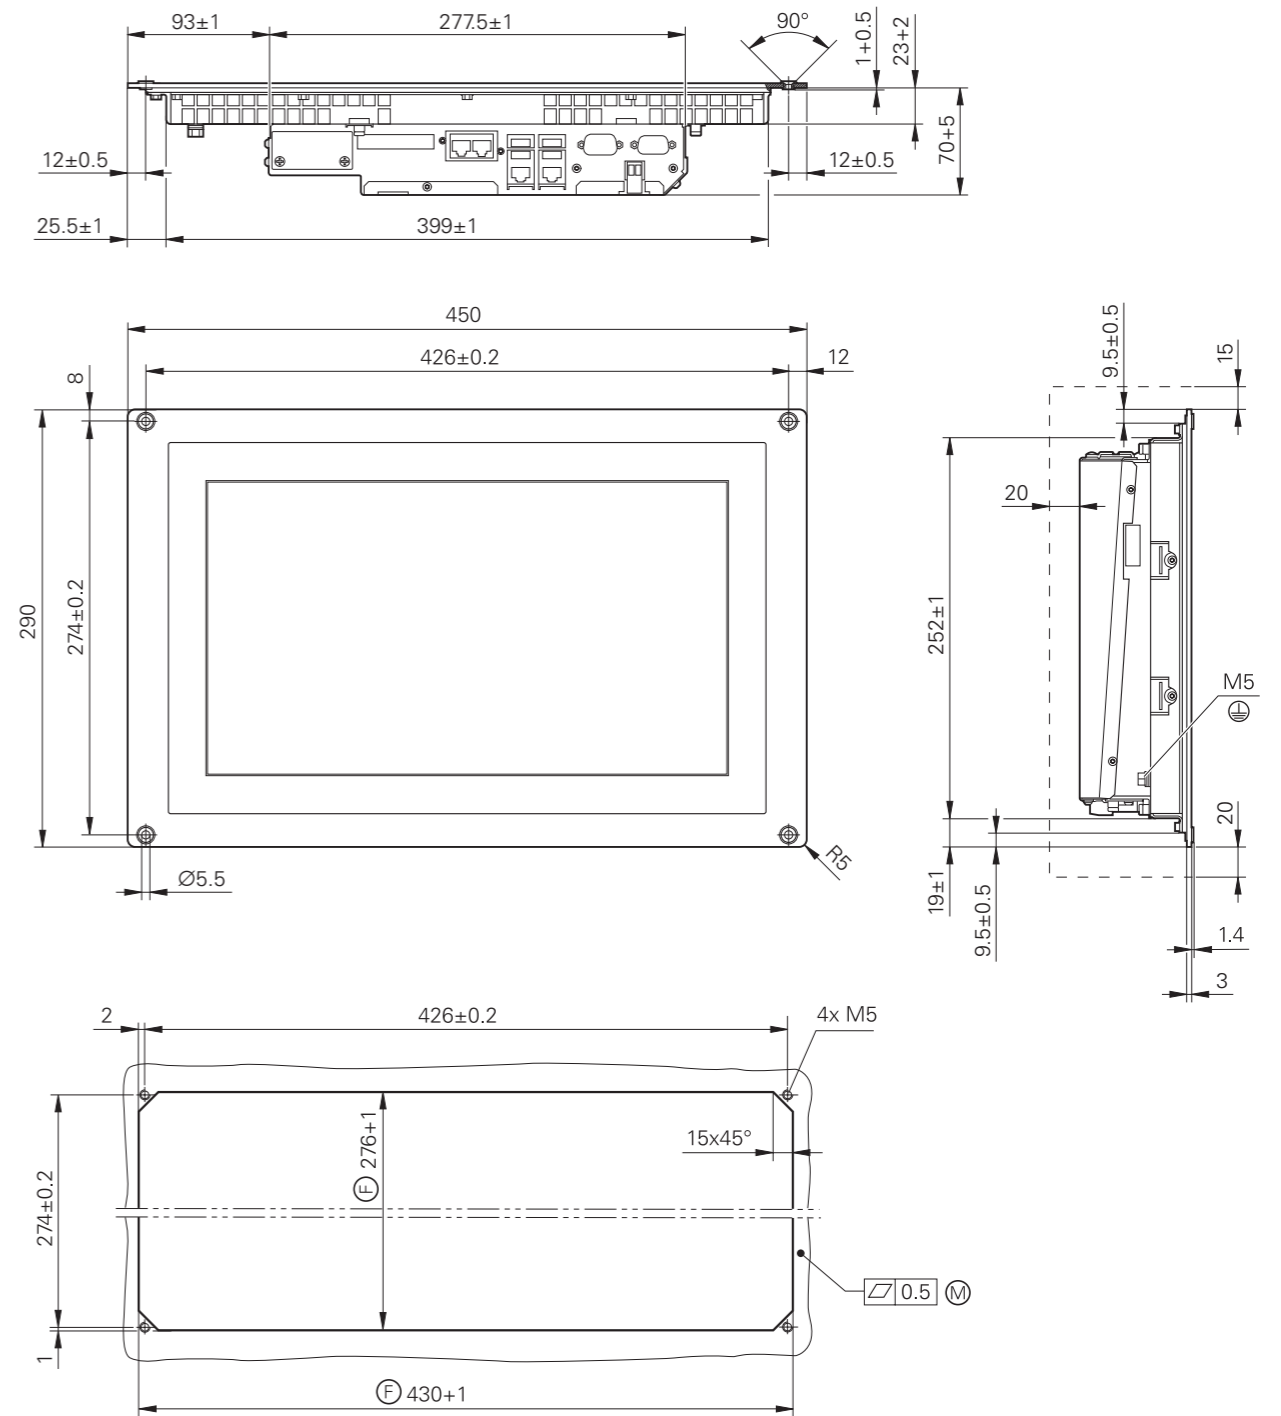


⊕ = Front panel opening
Ⓜ = Mounting surface
Ⓢ = Space for air circulation

Machine operating panel

MB 720T, MB 720T FS

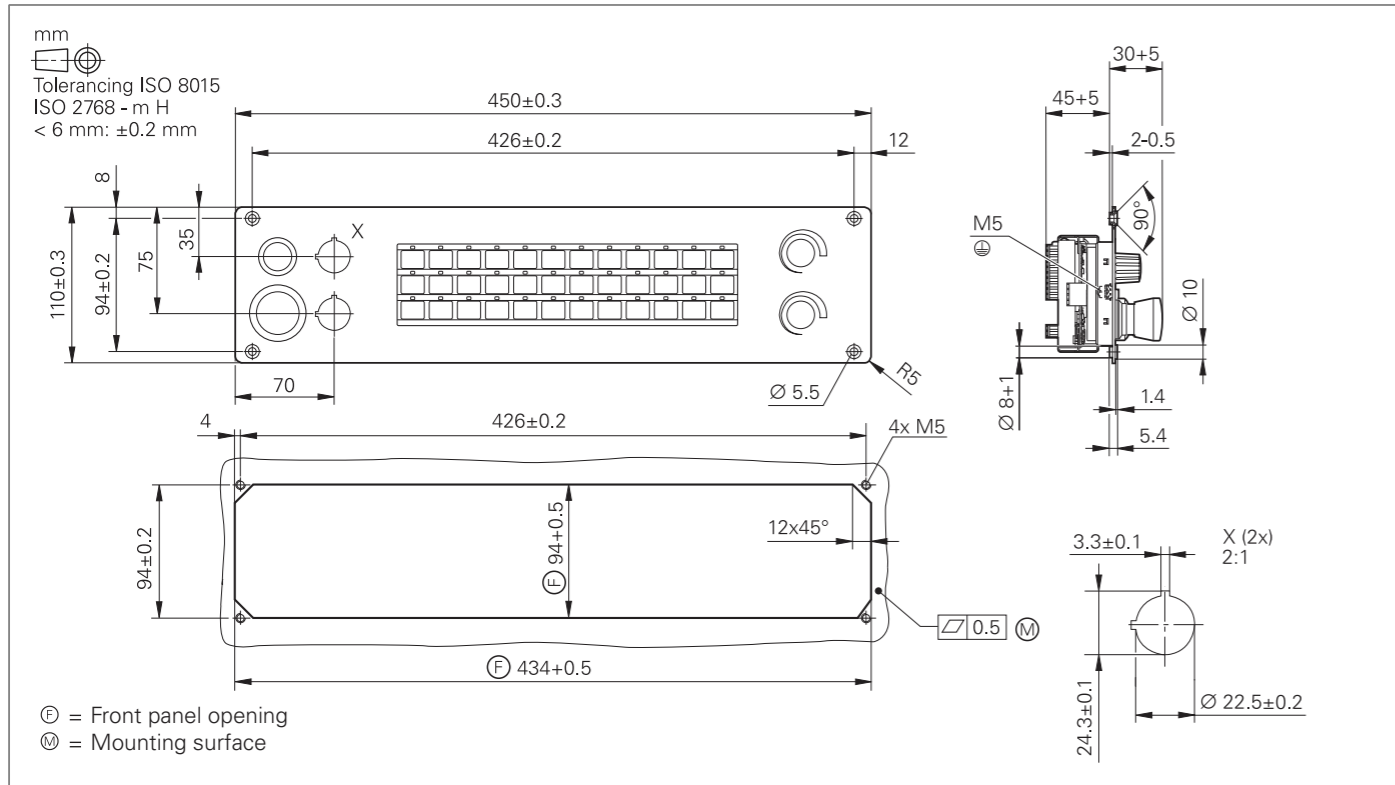


PLB 6001, PLB 600x FS

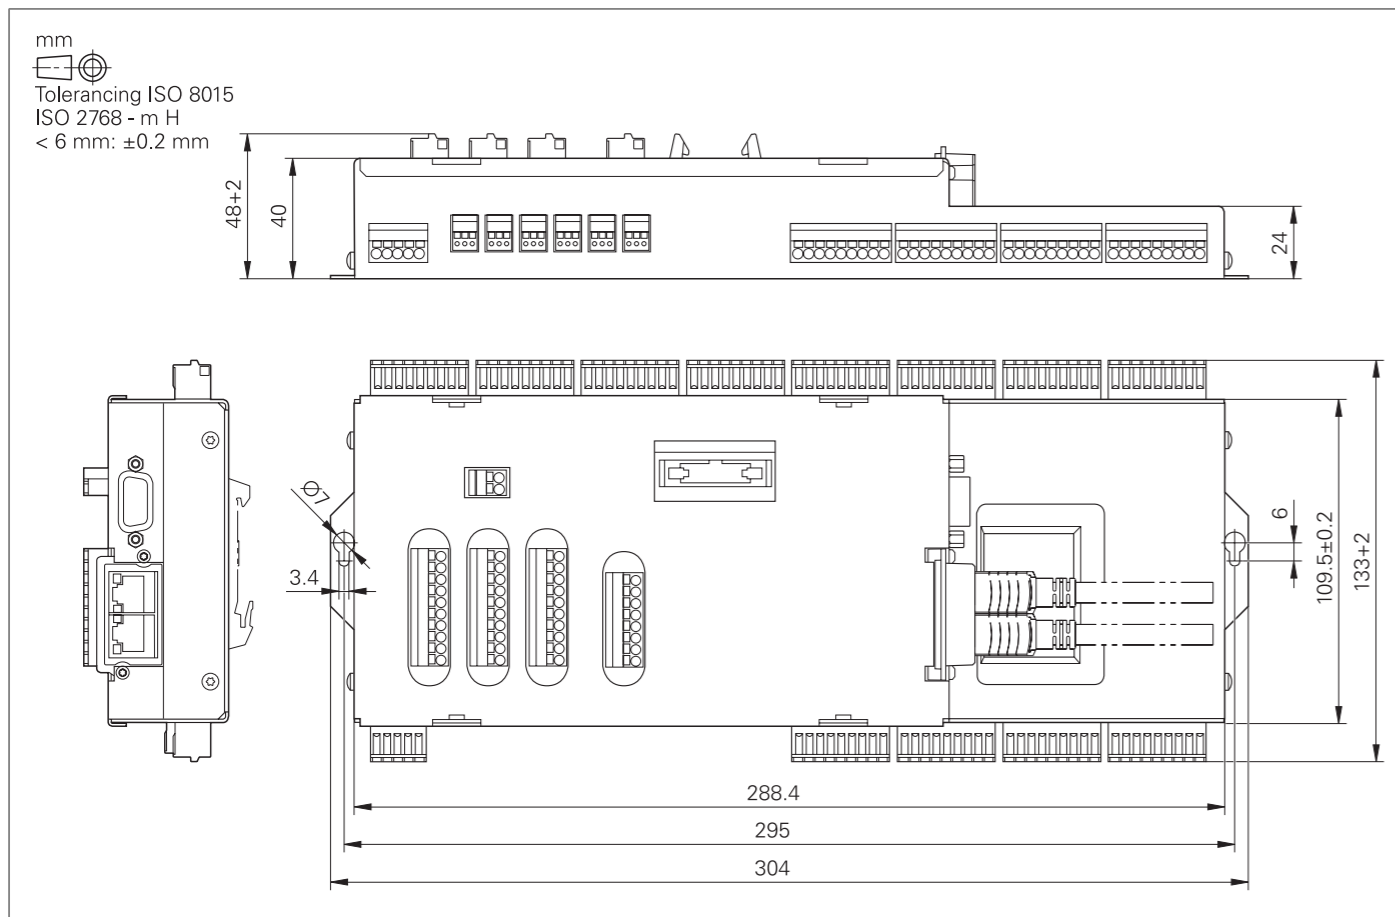


PLC inputs and outputs

PL 6000 (PLB 62xx, PLB 61xx)

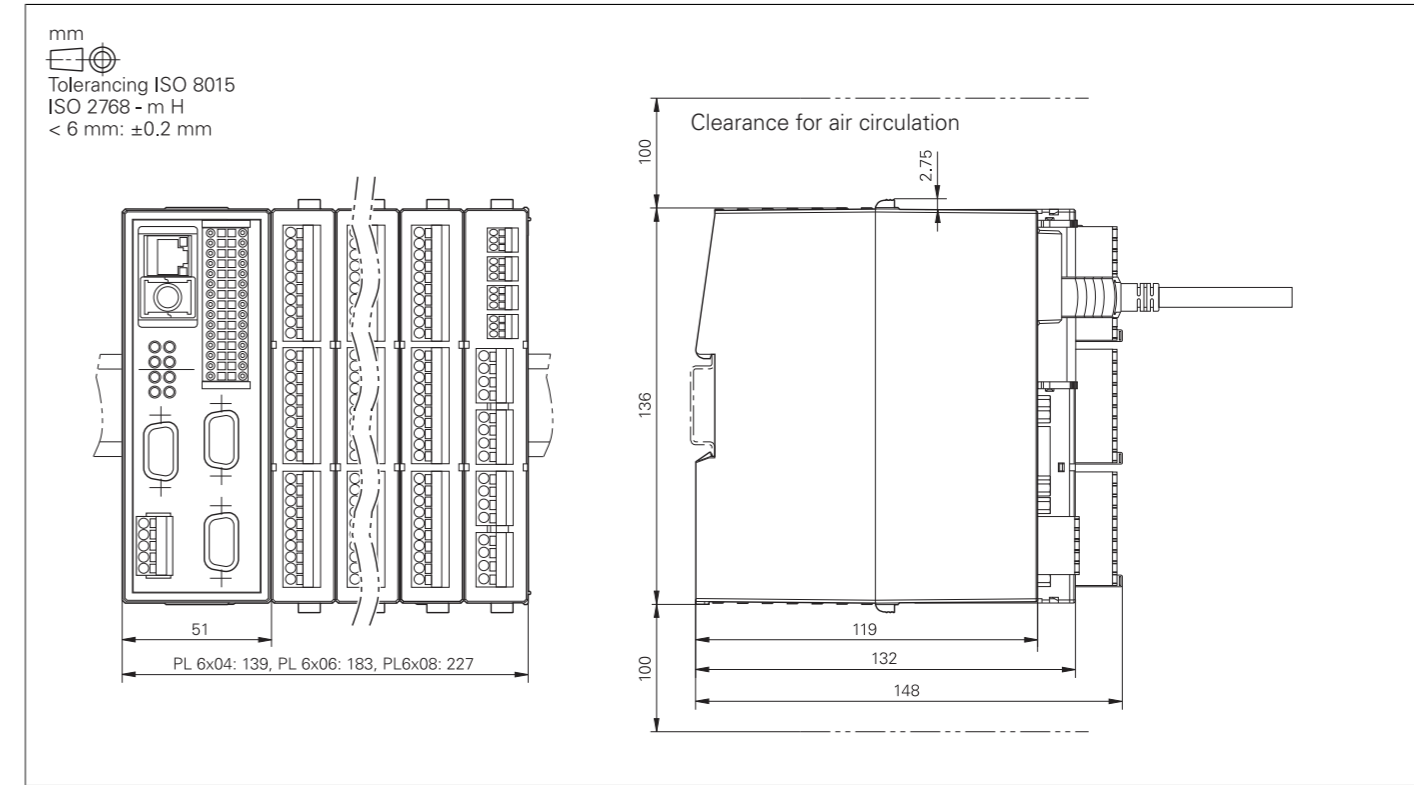


Electronic handwheels


HR 510, HR 510 FS

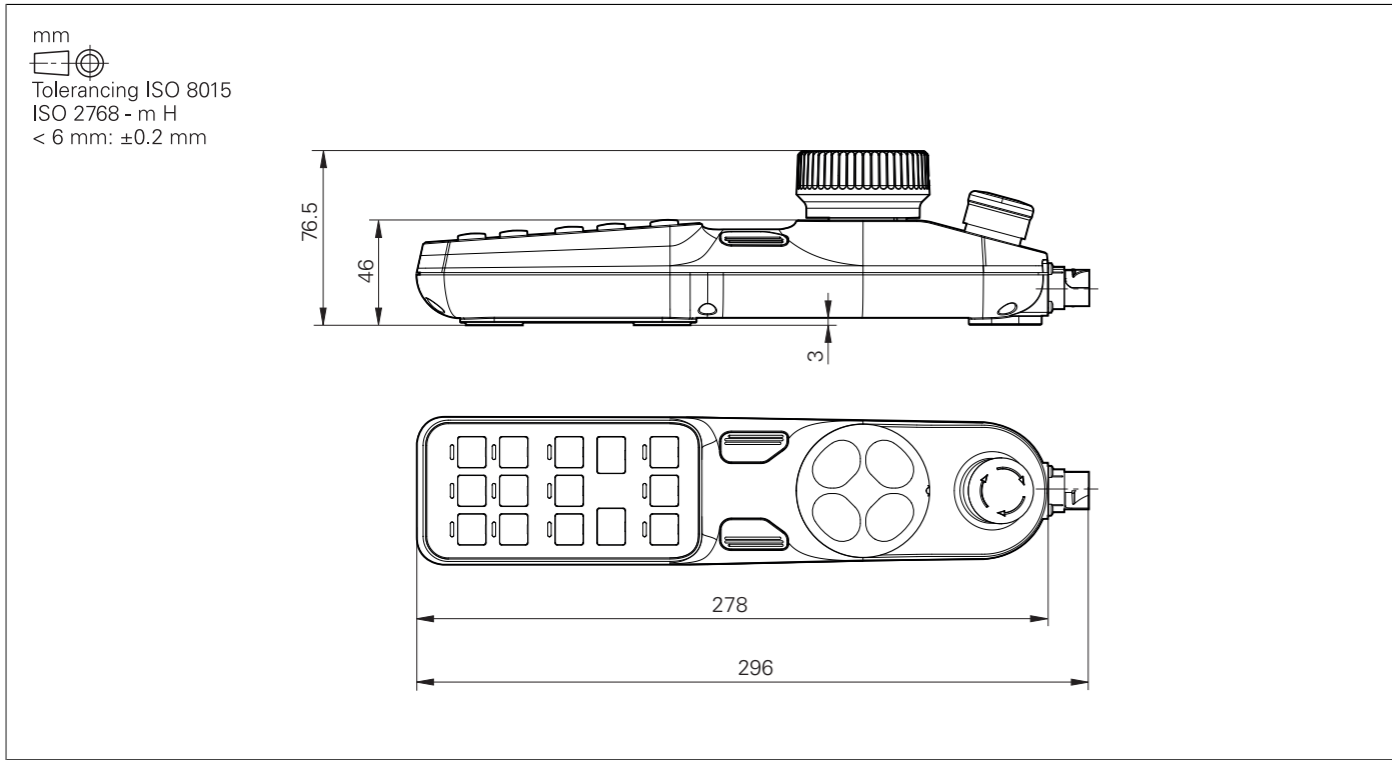


HR 520, HR 520 FS

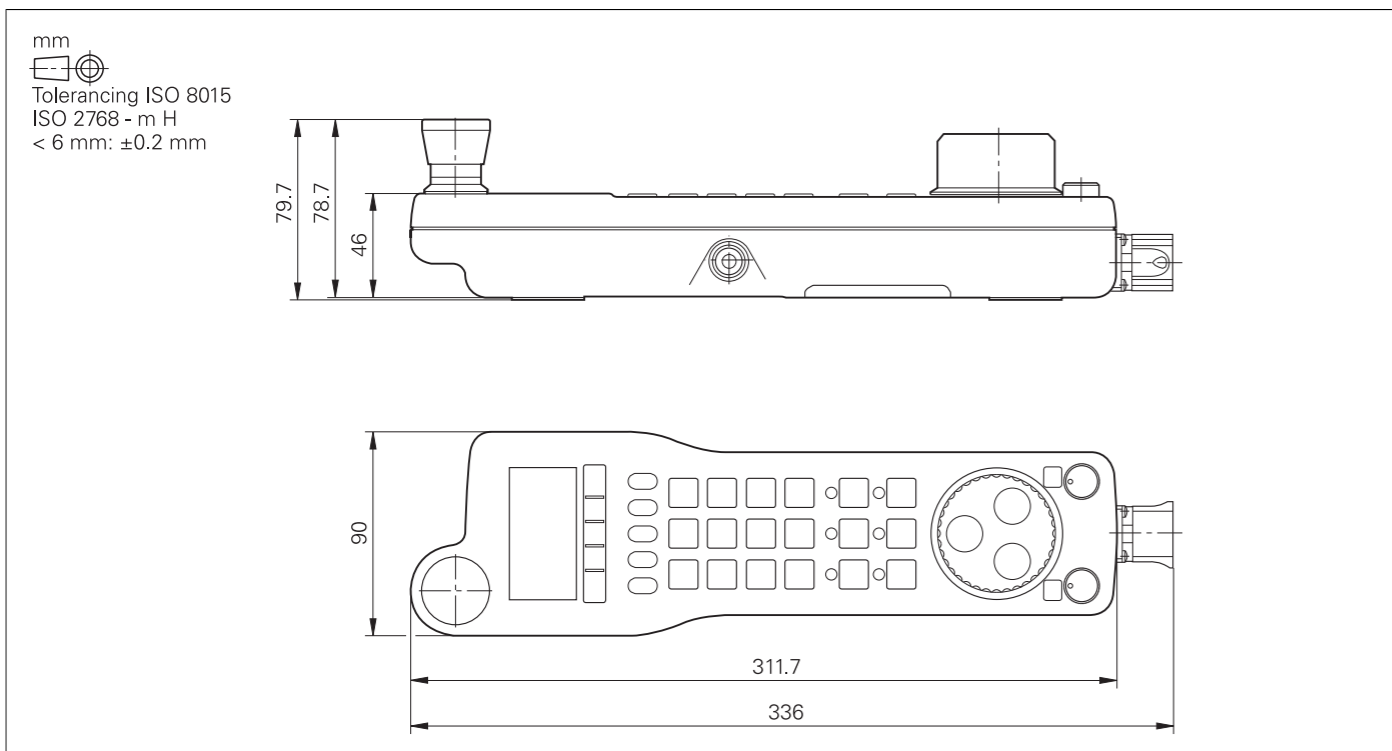


Holder for HR 520, HR 520 FS

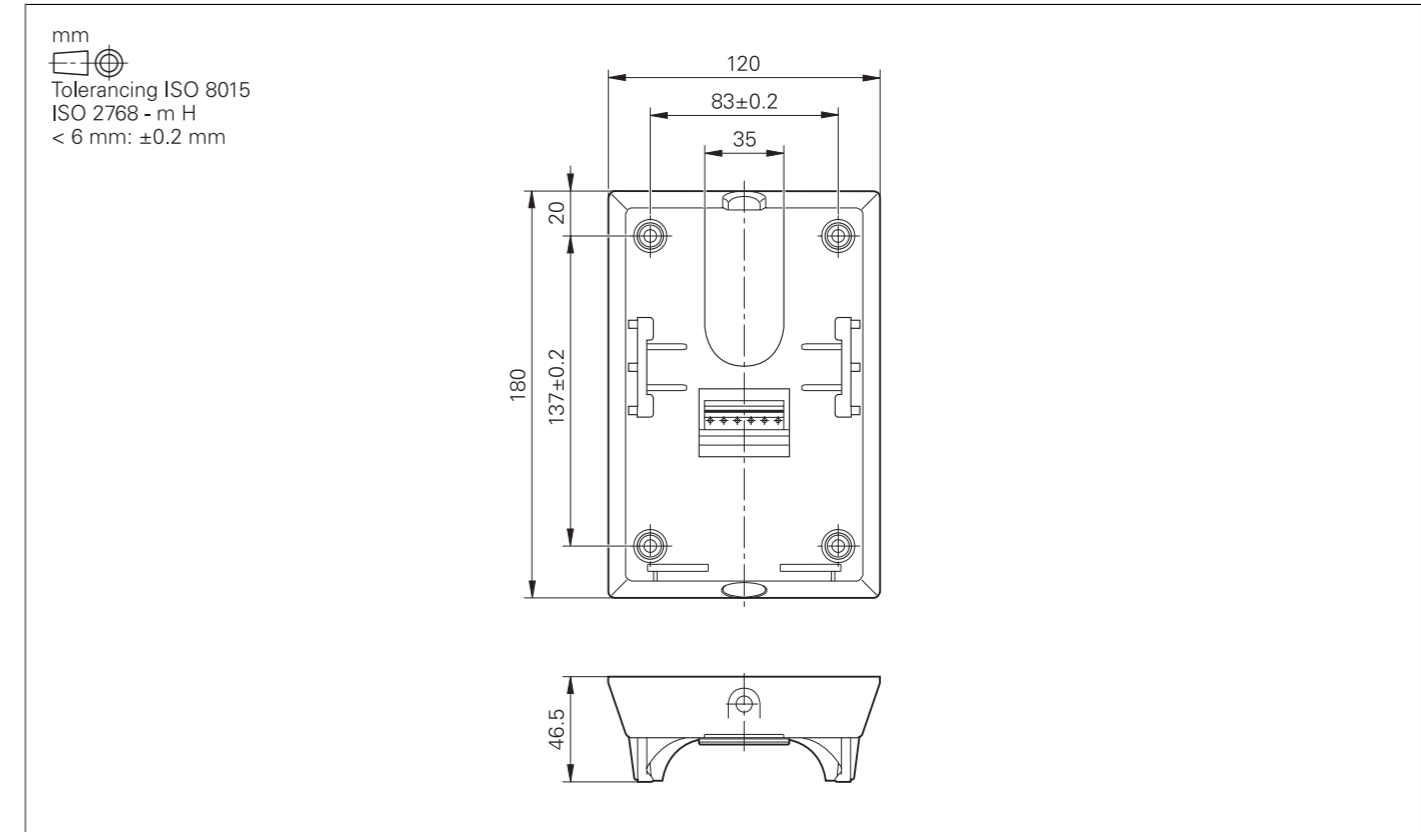


HR 550 FS

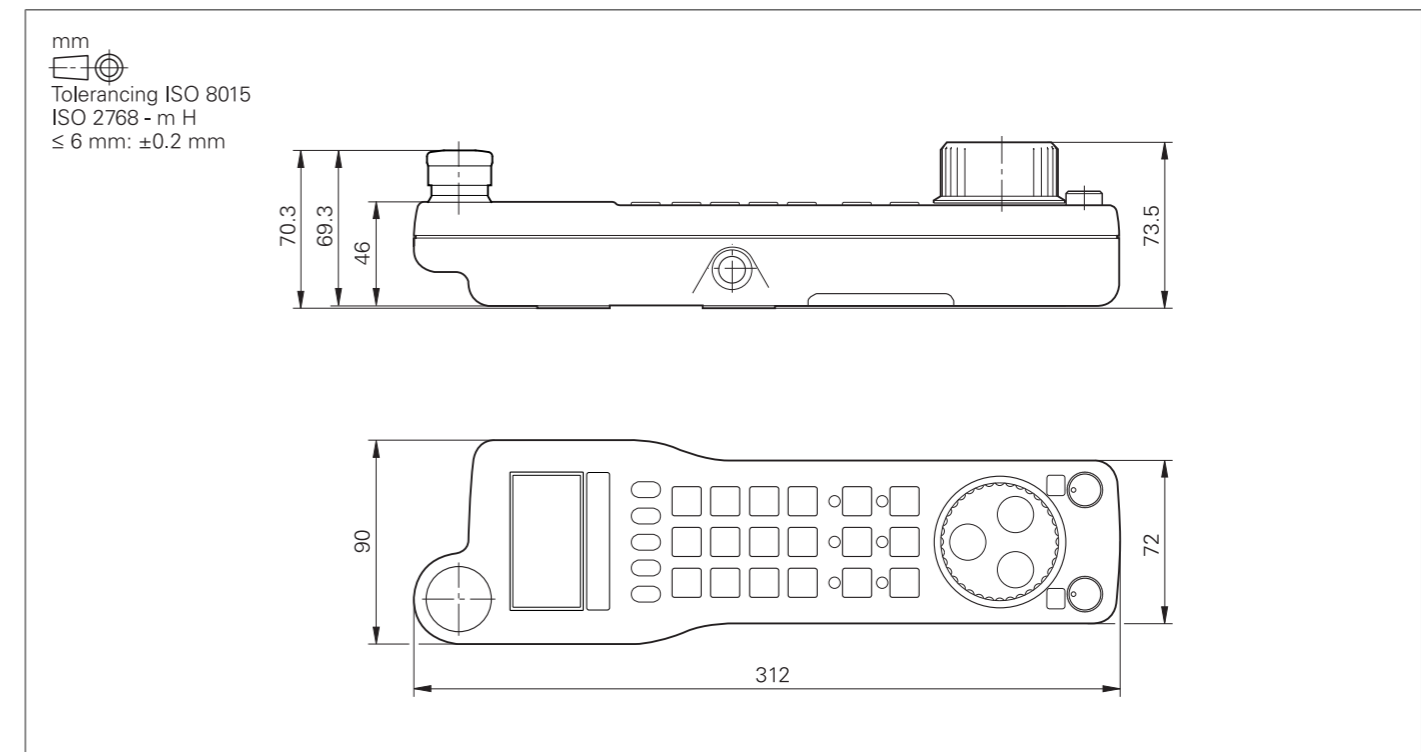


HRA 551 FS

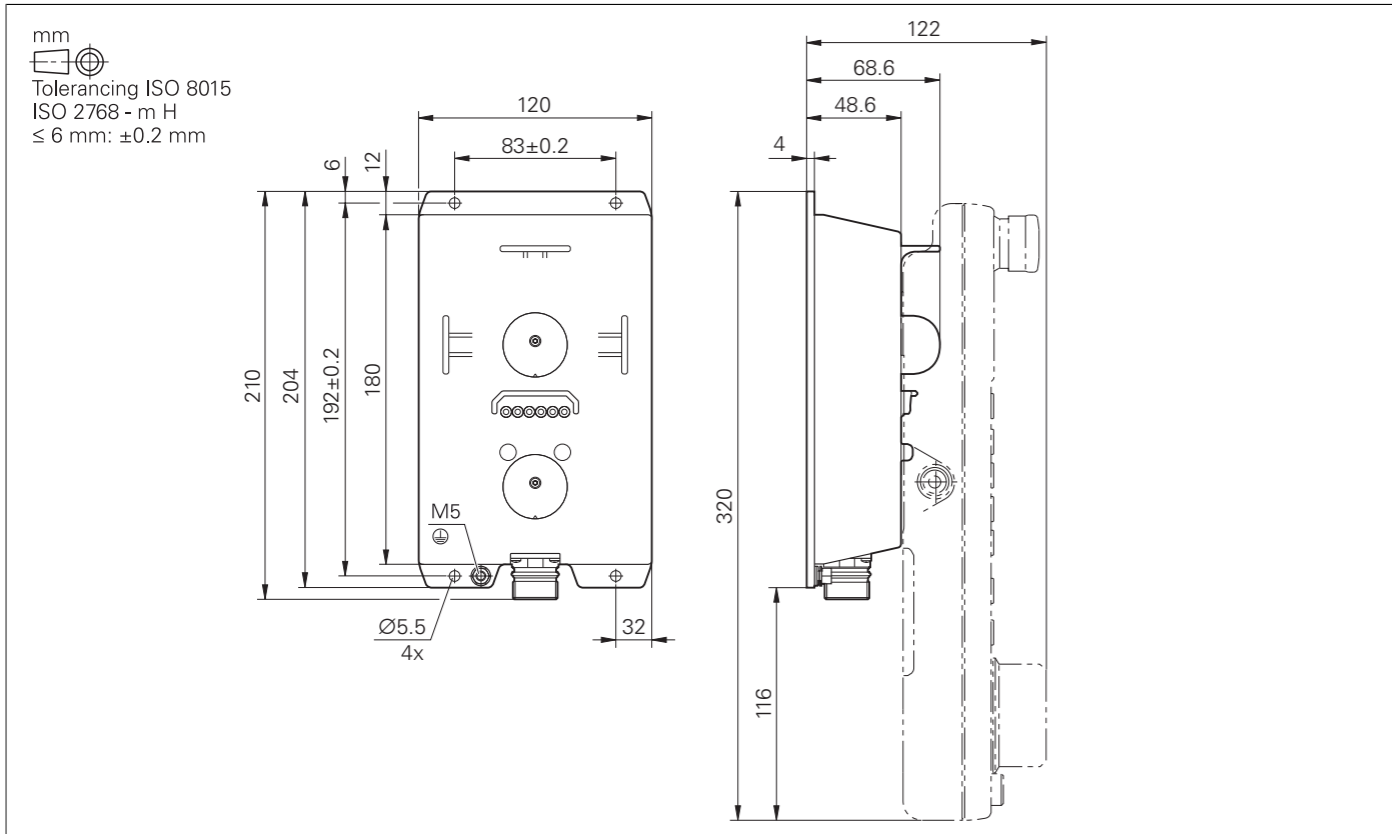

HR 130, HR 180

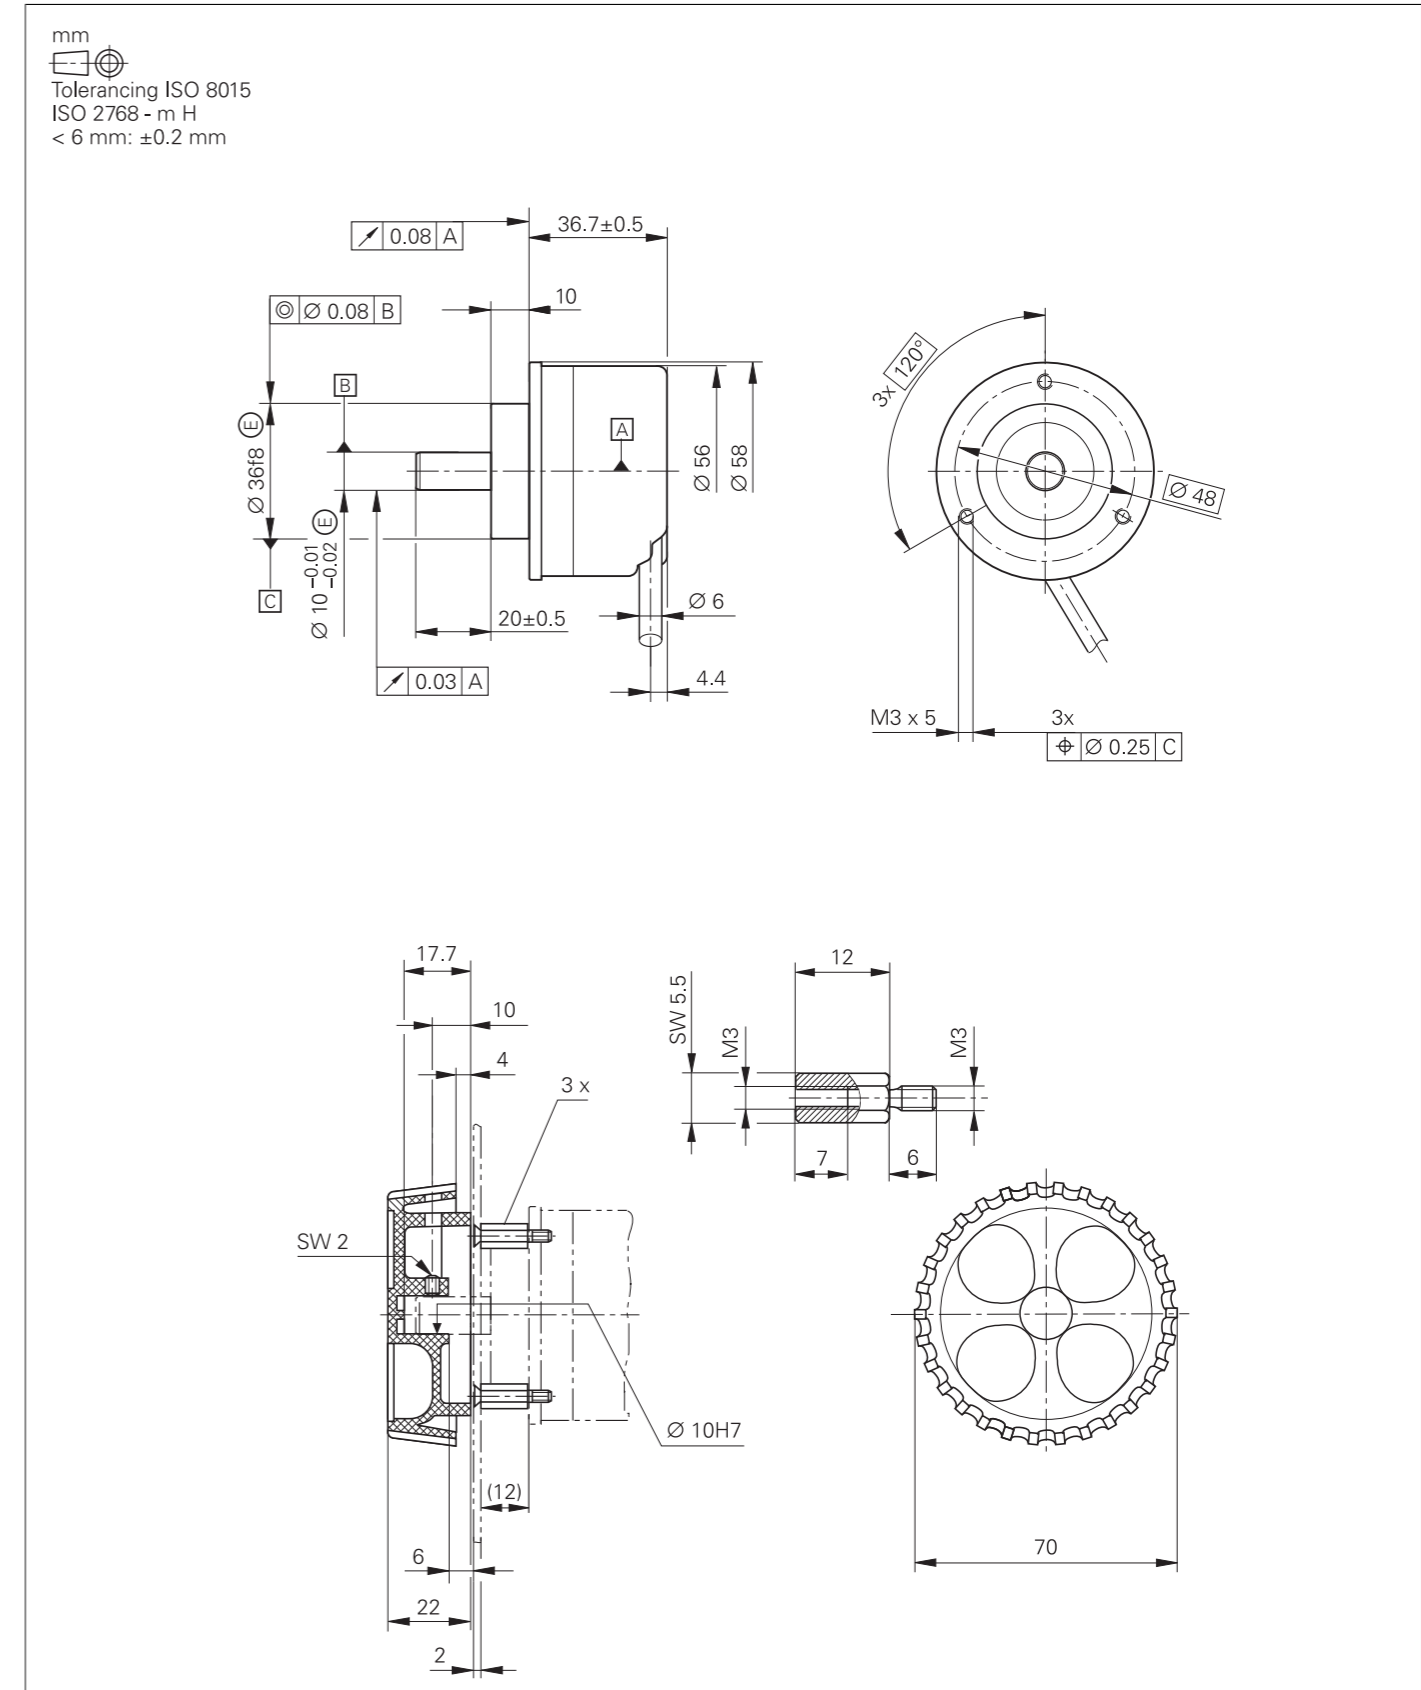


Adapter cable for handwheels (straight)

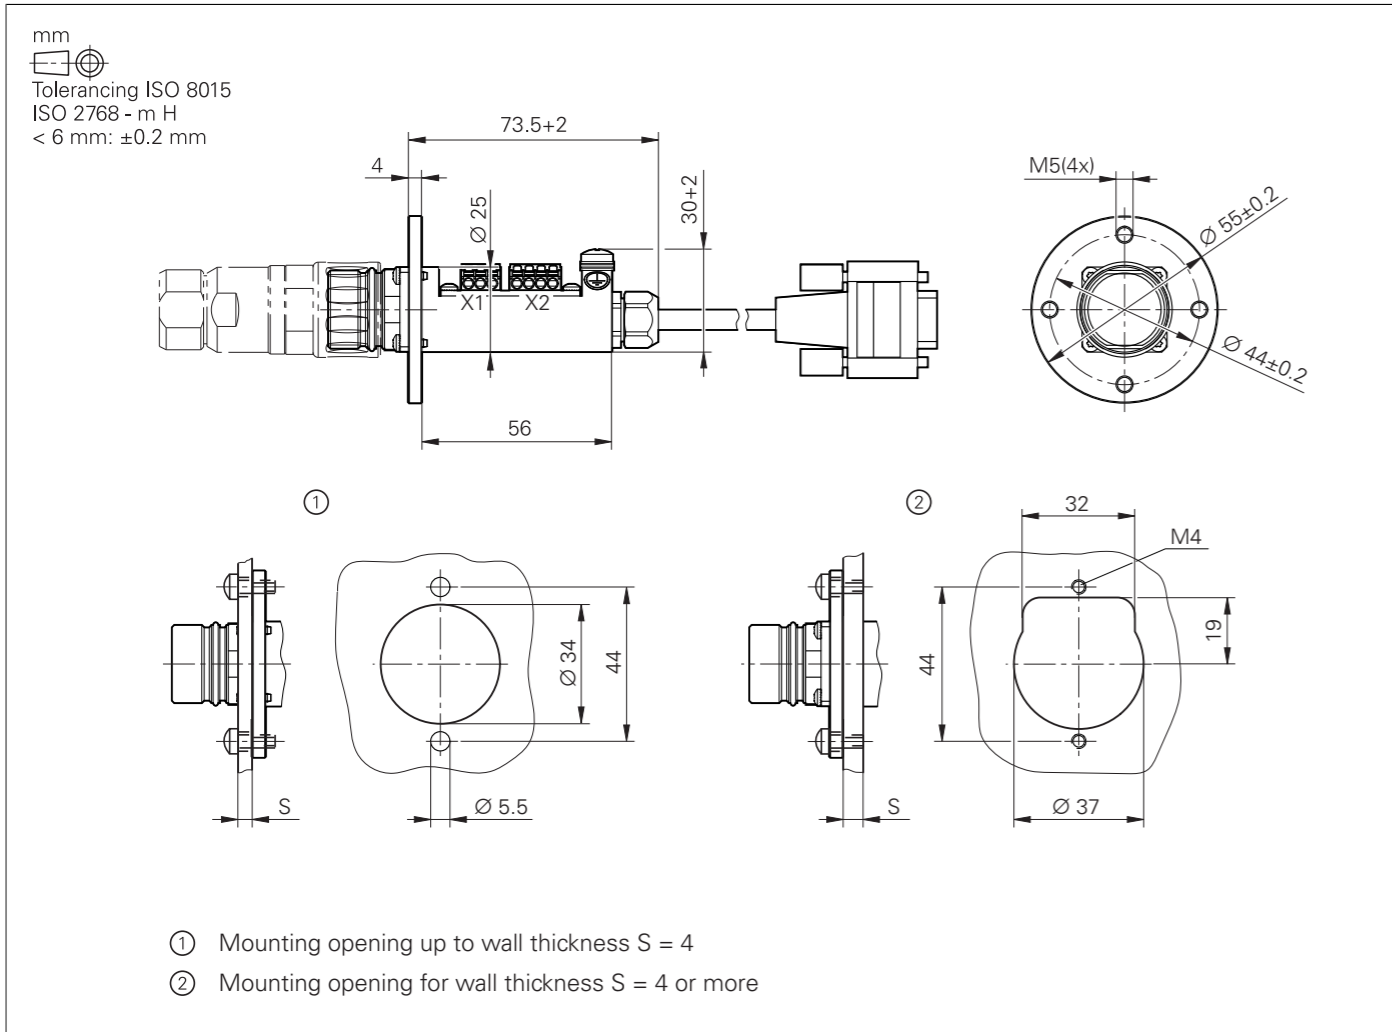

HR/HRA adapter cable to MC (straight connector)


Adapter cable for handwheels (angled)

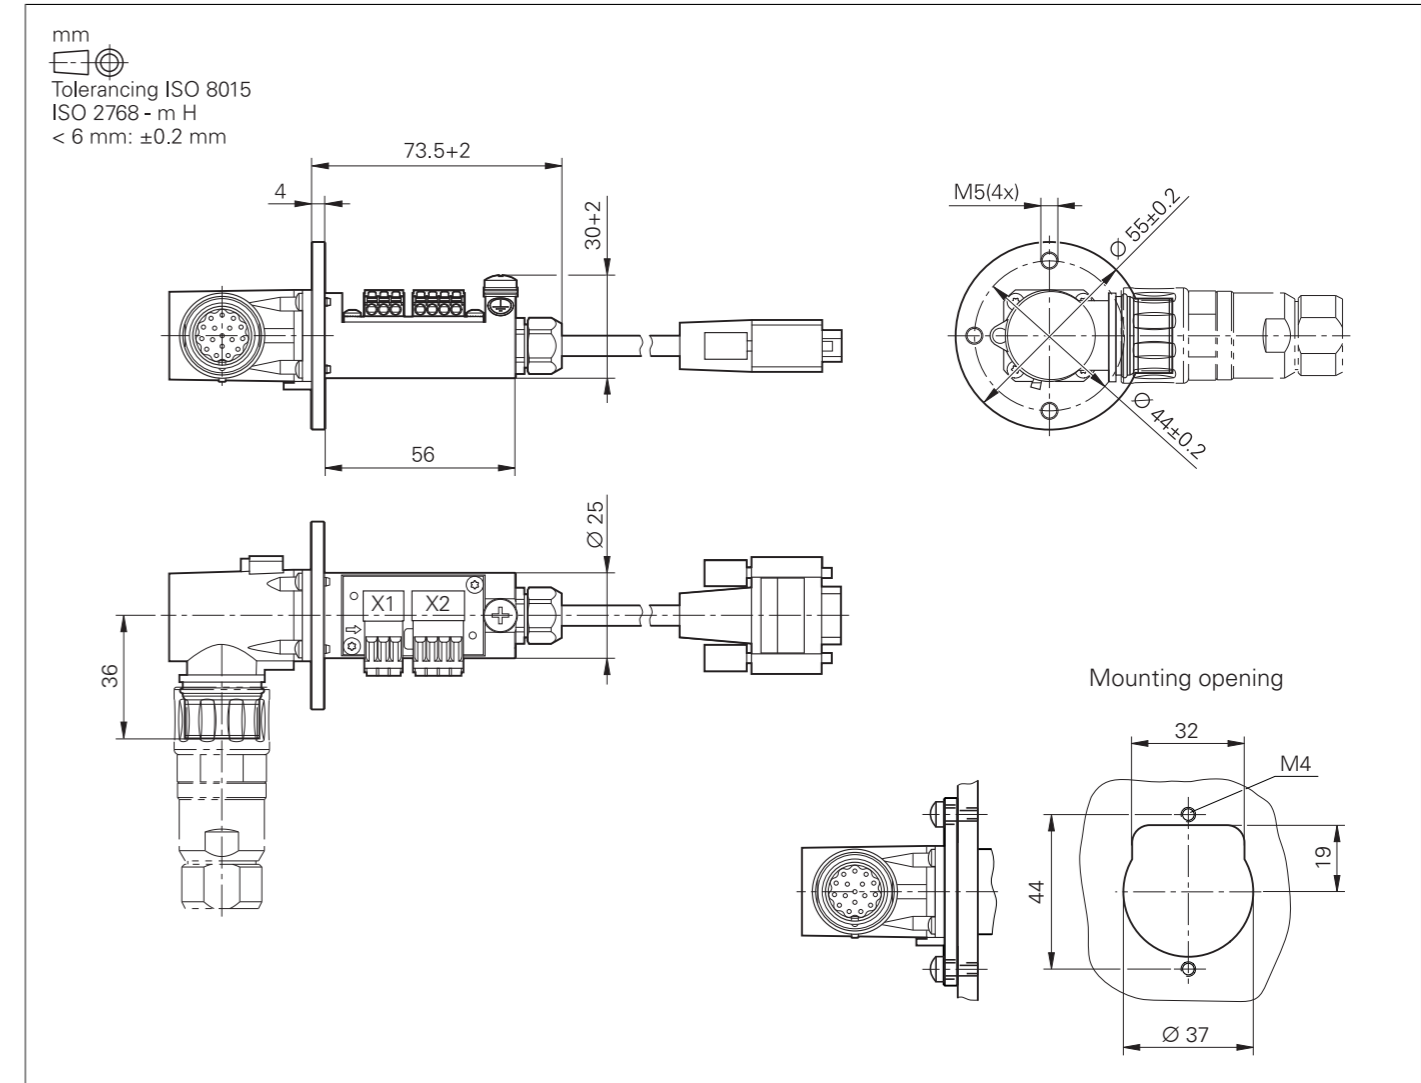


Adapter cable for HR/HRA to MC (angled connector)

Interface accessories


Line-drop compensator for encoders with EnDat interface

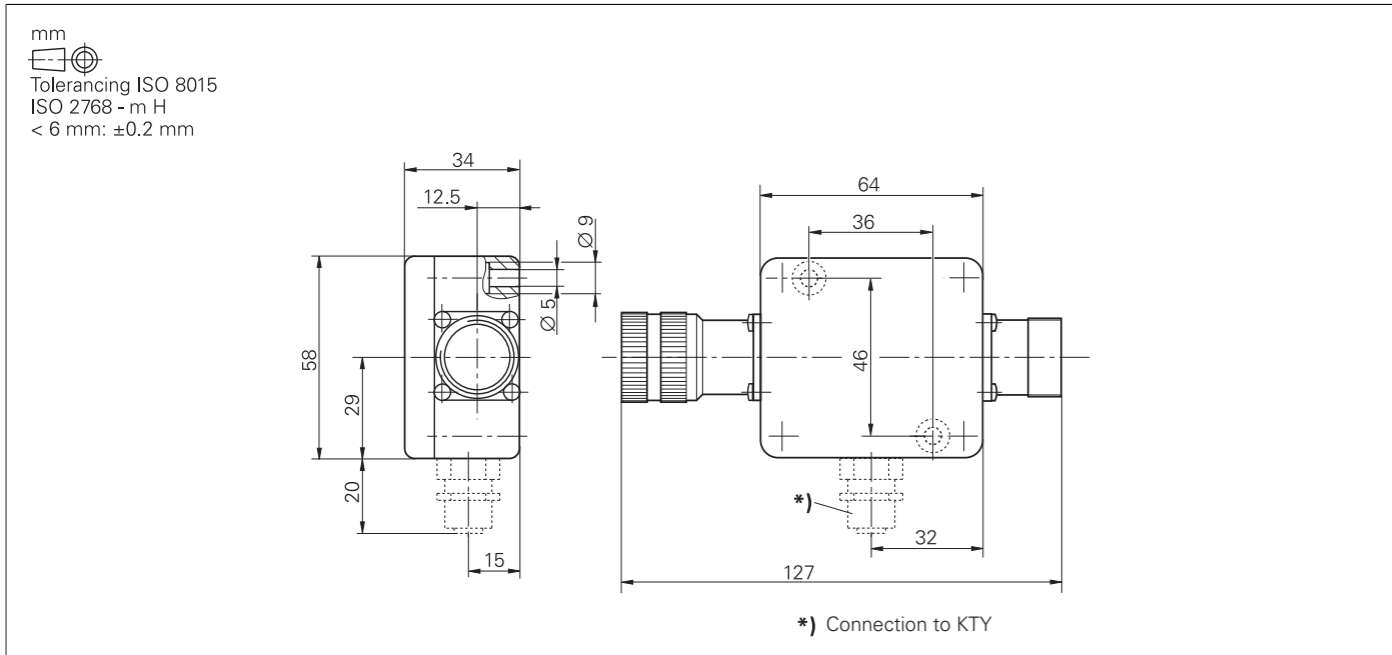

USB extension cable with hubs

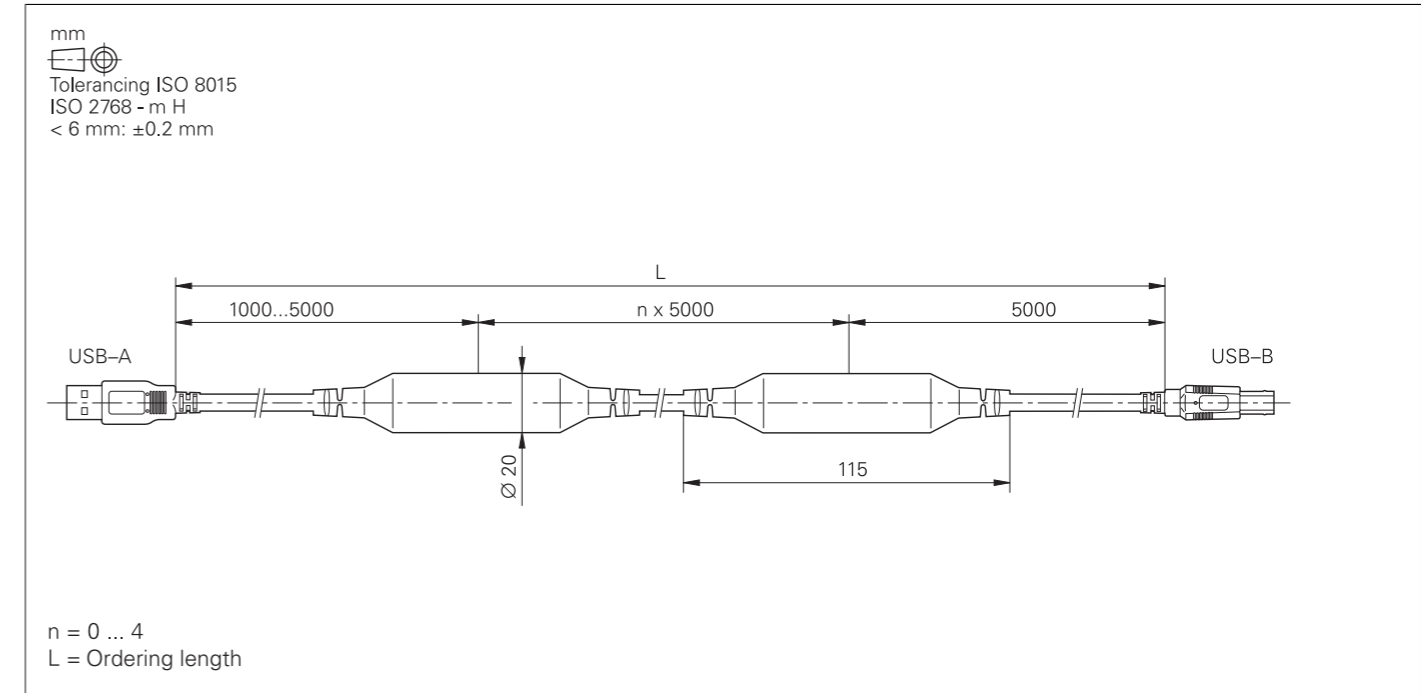

KTY adapter connector

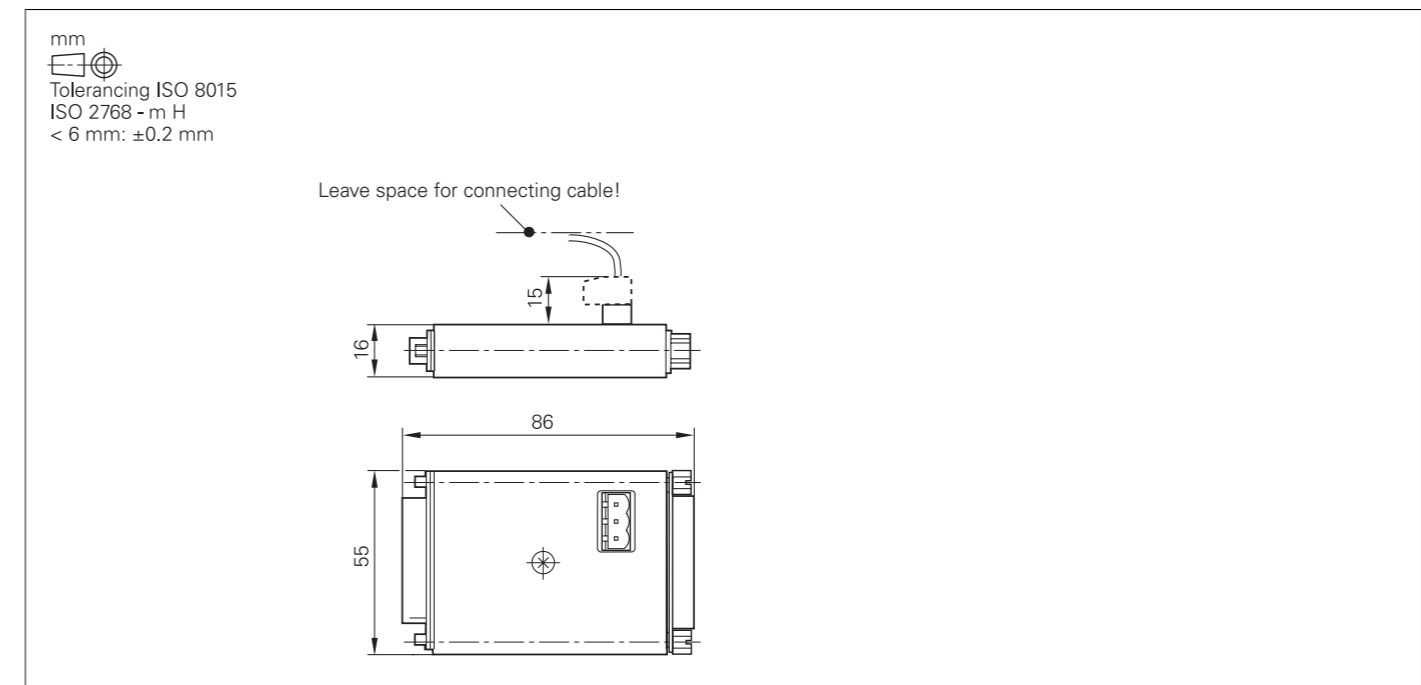

General information

Documentation

Technical documentation	<p>Technical Manuals (PDF format on HESIS-Web including Filebase)</p> <ul style="list-style-type: none"> • MANUALplus 620 ID 747323 • 1xx Inverter Systems ID 208962 • Gen 3 Drives ID 1252650 • Functional Safety (FS) ID 749363 • Functional Safety (FS) Supplement to the Technical Manual ID 1177599 • Python in HEIDENHAIN Controls ID 757807
User documentation	<p>User's Manuals</p> <ul style="list-style-type: none"> • MANUALplus 620 ID 1079948-xx • smart.Turn and DIN (ISO) Programming ID 1118606-xx <p><i>General</i></p> <ul style="list-style-type: none"> • TNCremo Integrated help • TNCremoPlus Integrated help • IOconfig Integrated help • PLCdesign Integrated help
Other documentation	<p>Brochures</p> <ul style="list-style-type: none"> • MANUALplus 620 ID 1082181-xx • Touch Probes ID 1113984-xx • Gen 3 Drives 527ID 1303180-xx • Motors ID 208893-xx • RemoTools SDK virtualTNC ID 628968-xx • Programming Station for Lathe Controls ID 826688-xx <p>Product Information documents</p> <ul style="list-style-type: none"> • HR 550 FS 527ID 636227-xx <p>Product Overviews</p> <ul style="list-style-type: none"> • Remote Diagnosis with TeleService ID 348236-xx <p>DVDs</p> <ul style="list-style-type: none"> • Touch Probes ID 344353-xx • Programming Station: DataPilot CP 640, MP 620 (Demo Version) ID 1230525-xx • Programming Station: DataPilot CP 640, MP 620 (Single Station License) ID 1230536-xx • Programming Station: DataPilot CP 640, MP 620 (Network License for 14 Stations) ID 1230537-xx • Programming Station: DataPilot CP 640, MP 620 (Network License for 20 Stations) ID 1230538-xx
Safety parameters	For HEIDENHAIN products (such as control components, encoders, or motors), the safety characteristics (such as failure rates or statements on fault exclusion) are available on product-specific request from your HEIDENHAIN contact person.
Basic circuit diagram	More information on basic circuit diagrams can be requested from your HEIDENHAIN contact person.

Service and training

Technical support	HEIDENHAIN offers the machine manufacturer technical support to optimize the adaptation of the control to the machine, including on-site support.
Exchange control	In the event of a malfunction, HEIDENHAIN guarantees the timely shipment of an exchange control (usually within 24 hours in Europe).
Helpline	Our customer service technicians are available for questions regarding adaption or in the event of malfunctions:
	<p>NC support +49 8669 31-3101 (initial configuration/optimization, field service/troubleshooting) E-mail: service.nc-support@heidenhain.de</p> <p>PLC/Python programming +49 8669 31-3102 Functional safety (FS) E-mail: service.plc@heidenhain.de</p> <p>NC/Cycle programming and kinematics +49 8669 31-3103 E-mail: service.nc-pgm@heidenhain.de</p> <p>Encoders / machine calibration +49 8669 31-3104 E-mail: service.ms-support@heidenhain.de</p> <p>Application programming +49 8669 31-3106 E-mail: service.app@heidenhain.de</p>
	If you have questions about repairs, spare parts, or exchange units, please contact our Service department:
	<p>Customer service, Germany +49 8669 31-3121 E-mail: service.order@heidenhain.de</p> <p>Customer service, international +49 8669 31-3123 E-mail: service.order@heidenhain.de</p>
Machine calibration	On request, HEIDENHAIN engineers will calibrate your machine's geometry (e.g., with a KGM grid encoder).
Technical courses	HEIDENHAIN provides technical customer training in the following subjects: <ul style="list-style-type: none"> • NC programming • PLC programming • TNC optimization • TNC servicing • Encoder servicing • Special training for specific customers

For more information on dates or registration:

Technical training courses in Germany	+49 8669 31-3049 E-mail: mtt@heidenhain.de
Technical training courses outside of Germany	www.heidenhain.com EN ► Service & Support ► Technical training

Subject index

A

Absolute encoders..... 49
 Accessories..... 5
 Additional modules..... 25
 Advanced Dynamic Prediction (ADP).... 52
 API DATA..... 57
 Axes..... 45
 Axis clamping..... 50
 Axis feedback control..... 50

B

Backlash..... 55
 Basic modules..... 22
 B Axis..... 46
 Bus diagnosis..... 57

C

Cable overview..... 33
 C-Axis Machining (software option 55).. 47
 CMA-H 04-04-00..... 25
 Combined PROFIBUS DP/PROFINET IO module..... 25
 Compensation of torque ripples..... 50
 Component Monitoring..... 54
 Components..... 4
 ConfigDesign..... 56
 Connected Machining..... 66
 Connecting cables..... 28
 Context-sensitive help..... 54
 Control loop cycle times..... 50
 Control systems with external safety... 43
 Control systems with integrated functional safety (FS)..... 41
 Counter Spindle (software option 132).. 47
 Crossover Position Filter (CPF)..... 51

D

Data interfaces..... 64
 Degrees of protection..... 67
 Digital control design..... 39
 Digital servo control..... 50
 Display step..... 6
 DNC applications..... 66
 Double speed control loops..... 51
 Driven tools..... 48

E

EA module for axis release..... 23
 Electromagnetic compatibility..... 68
 Electronic handwheels..... 26
 Encoder inputs..... 49
 EnDat 2.2..... 39
 Error compensation..... 55
 Ethernet..... 64
 Expansion PL..... 23

F

Feedforward control..... 50
 Fieldbus systems..... 25
 Functions for the user..... 10

G

Gantry axes..... 46
 Gear ranges..... 47

H

HEROS 5..... 44
 HR 130..... 28
 HR 130, HR 180..... 75
 HR 180..... 28
 HR 510..... 26
 HR 510, HR 510 FS..... 72
 HR 510 FS..... 26
 HR 520..... 27
 HR 520, HR 520 FS..... 72
 HR 520 FS..... 27
 HR 550 FS..... 27, 73
 HRA 551 FS..... 27, 74
 HSCI..... 39
 HSCI adapter..... 24
 HSCI control components..... 16
 Hysteresis..... 55

I

I/O modules..... 23
 Incremental encoders..... 49
 Initial setup and diagnostic aids..... 56
 Input resolution..... 6
 Installation elevation..... 68
 Integrated inverter..... 50
 Integrated PLC..... 59
 Interfacing to the machine..... 8
 Inverter system..... 35
 IOconfig..... 23

J

Jerk..... 52
 Jerk limiting..... 52

L

Linear error..... 55
 Load Adaptive Control (LAC)..... 55
 Load Monitoring..... 54
 Log..... 57
 Look-ahead..... 52

M

Main computer..... 16
 Master keyword..... 18
 Maximum spindle speed..... 47
 MB 720 T..... 21
 MB 720 T..... 70
 MC 8420T..... 16
 MC 8420 T..... 17
 Module for analog axes..... 25
 Monitoring functions..... 53
 Mounting and electrical installation..... 67

N

Nonlinear error..... 55

O

Online Monitor..... 57
 Operating system..... 44
 Oscilloscope..... 56

P

PAE-H 08-00-01..... 23
 PL 6000..... 22, 71
 PLA-H 08-04-04..... 23
 PLB 6001, PLB 600x FS..... 70
 PLB 600x..... 24
 PLB 6104..... 23
 PLB 6104 FS..... 23
 PLB 6106..... 23
 PLB 6106 FS..... 23
 PLB 6108..... 23
 PLB 6108 FS..... 23
 PLB 6204 EnDat..... 22
 PLB 6206 EnDat..... 22
 PLB 6208 EnDat..... 22
 PLB 6210 EnDat..... 22
 PLB 6210 FS EnDat..... 22
 PLC axes..... 46, 60
 PLC basic program..... 62
 PLCdesign..... 60
 PLC encryption..... 59
 PLC inputs/outputs..... 59
 PLC positioning..... 60
 PLC programming..... 59
 PLC soft keys..... 60
 PLC window..... 60
 PLD-H 04-04-00 FS..... 23
 PLD-H 04-08-00 FS..... 23
 PLD-H 08-04-00 FS..... 23
 PLD-H 08-16-00..... 23
 PLD-H 16-08-00..... 23
 Position-controlled spindle..... 47
 PROFIBUS DP module..... 25
 PROFINET IO module..... 25
 Proper minimum clearance..... 67
 Python OEM Process..... 61

R

Real-time coupling function..... 46
 Remote Desktop Manager..... 66
 RemoTools SDK..... 66
 Reversal spikes..... 55

S

Servo lag..... 50
 SIK component..... 18
 SIK for purely analog drive systems..... 20
 Sliding friction..... 55
 Smoothed jerk..... 52
 Snap-on keys..... 29, 31
 Software options..... 14
 Software tools..... 5
 Specifications..... 6
 Spindle and counter spindle..... 47
 Spindle override..... 47
 Spindle Synchronism..... 48

State Reporting..... 57
 Static friction..... 55
 Storage medium..... 18
 Synchronized axes..... 46
 System PL with EnDat support..... 22

T

Table function..... 57
 TeleService..... 57
 Thermal expansion..... 55
 TNCAnalyzer..... 58
 TNCdiag..... 56
 TNCkeygen..... 18
 TNCopt..... 57
 TNCremo..... 65
 TNCremoPlus..... 65
 TNCscope..... 57
 TNCtest..... 58
 Tool carriers..... 45
 Torque Control..... 46
 Trace function..... 57
 Traverse range..... 45

U

USB..... 64
 User administration..... 44
 User management..... 13

HEIDENHAIN

Mastering nanometer accuracy



HEIDENHAIN

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5


83301 Traunreut, Germany

☎ +49 8669 31-0

☎ +49 8669 32-5061

✉ info@heidenhain.de

www.heidenhain.com



HEIDENHAIN
worldwide